

\$7.00
\$2.00

MAY 22 2000

KENT COUNTY REMONUMENTATION

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
1999 JUL - 9 AM 11:19

REG. OF DEEDS

11240

Register of Deeds Stamp & File Number

For corners in

KENT COUNTY

(County)

Located in:

Corner Code #

Solon Twp.

1. Public Land Survey

T10N R 11W

J-9

T R

T R

T R

2. Property Controlling in Section

S T R

S T R

3. Miscellaneous Property in Sec.

S T R


S T R

4. Lot No. _____, Recorded Plat _____

5. Private Claims _____

I, Kirk Breitels, in a field survey on May 17, 19 99 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

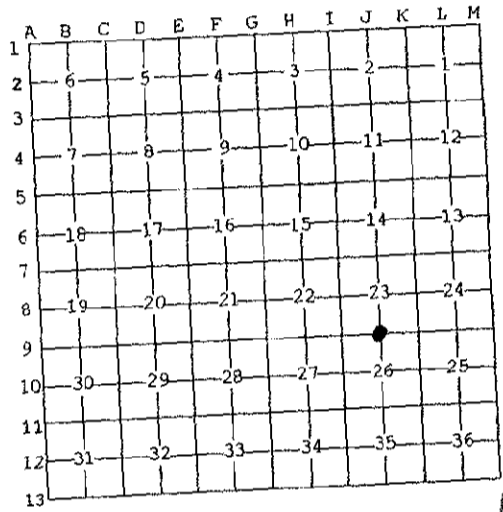

A. Description of original monument and accessories and/or subsequent restoration:

J-9	1837	GLO	Cathcart	Set Post
	1973	LCRC #374	Bonnema	1/2" Iron
	1981	LCRC #2133	Jonker	Set Kent County Monument in Mon. Box
	1990	LCRC #5625	Marschall	Kent County Monument

P.A. 345 1990 KENT COUNTY
PEER APPROVED 6/24/99
CHAIRMAN [Signature]

The position of this corner was previously approved by the Kent County Remonumentation Peer Group, monumented by Robert J. Jonker on 9-25-81 and was recorded per LCRC #2133.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

J-9 Found Kent County Monument (Harrison) per witnesses from above LCRC as set by Robert J. Jonker in place of the 1/2" Iron he found inside a Mon. Box. Said Iron checks with LCRC #374.

LCRC #2133	Nail & Remon. tag 10" Maple	S09°E 26.60'	Nail & Remon. tag 12" Maple	S15°E 26.59'
	Nail & Remon. tag Fence Post	N02°E 38.72'	Nail & Remon. tag 18" Maple	S70°E 78.28'
	Nail & Remon. tag 12" Maple	S69°E 78.33'	Nail & Remon. tag Tw. 6" Maple	N05°W 58.60'
	Nail & MSHD tag P. Pole	N54°W 68.77'	Nail & MSHD tag P. Pole	N55°W 68.71'

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

J-9 Standard Kent County Monument in Mon. Box	S15°E 26.59'
Nail & KC Remon. tag W. side 12" Stump	S70°E 78.21'
Nail & KC Remon. tag S. side 20" Maple	N05°W 58.44'
Nail & KC Remon. tag E. side Tw. 10" Maple	N55°W 68.73'
Nail & MSHD tag SW side P. Pole	S75°W 58.80'
Top C/L Telephone Box	
C/L E-W asphalt road is North 4' ±	



Signed by [Signature]
Surveyor's Michigan License No. 30077

Date 6/24/99