


LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY	25 T. 10 N. R. 12 W.	L-10
2. PROPERTY CONTROLLING IN SECTION	25 T. 10 N. R. 12 W.	12, 11
3. MISCELLANEOUS PROPERTY IN SECTION	, T. N. S., R. E. W.	
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

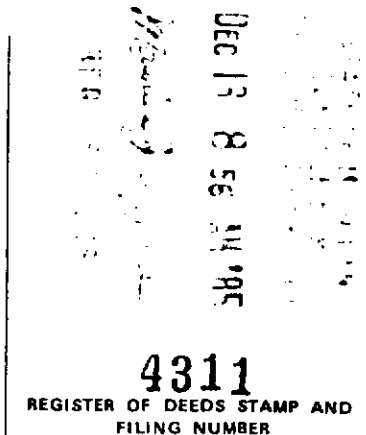

I, Donald L. Bissell, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on July, 19 85, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

L-10 Center Section
Set 4" x 36" Conc. mon. at
intersection of 1/4 lines.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

L-10 Center Section 4" x 36" conc. mon. South - 48.03' - Spike in 10" Triple Cherry S56°W - 16.15' - Spike in 4" Maple North - 19.24' - Spike in 6" Oak N34°E - 17.15' - Spike in 6" Oak East - 105± - Center Trail Road	11 - 4" x 36" conc. mon. Center 1/8 cor. SW 1/4 S76°E - 43.18' - Spike in 10" R.Pine S43°W - 25.12' - Spike in 10" R.Pine N86°W - 13.64' - Spike in 10" R.Pine N17°W - 35.83' - Spike in 10" R.Pine East - 16' - E - Pavement
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

12. Set 4" x 36" conc. mon. E 1/8 post of SW 1/4
 S5°W - 18.86' - Spike in 10" R.Pine S82°E - 10.92' - Spike in 12" R.Pine
 N80°W - 7.11' - Spike in 9" R.Pine
 N25°E - 22.75' - Spike in 6" B.Oak

SIGNED BY _____ DATE _____

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____

APPROVED AND SIGNED BY Donald L. Bissell DATE 12-9-85
CHIEF OF SURVEY PARTY
MICHIGAN REGISTERED LAND SURVEYOR

SURVEYOR'S MICHIGAN REGISTRATION NO. 18655

