

MAY 22 2000

KENT COUNTY REMONUMENTATION

\$7.00  
\$2.00

SECTION

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN  
COUNTY OF KENT  
RECEIVED FOR RECORD  
1999 MAR 24 AM 9:11

REG. OF DEEDS

11144

Register of Deeds Stamp & File Number


For corners in

KENT COUNTY (County)	Located In:	Corner Code #
1. Public Land Survey	T 10NR 12W	Tyrone Twp. E-3
	T ___ R ___	_____
	T ___ R ___	_____
	T ___ R ___	_____
2. Property Controlling in Section	S ___ T ___ R ___	_____
	S ___ T ___ R ___	_____
3. Miscellaneous Property in Sec.	S ___ T ___ R ___	_____
	S ___ T ___ R ___	_____

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, Kirk Breitels, in a field survey on Feb. 9, 1999 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and for that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

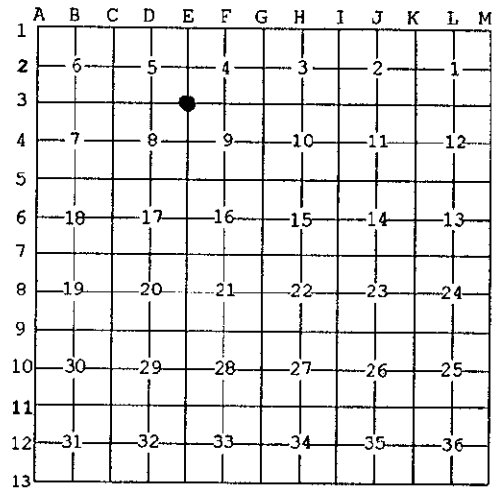

A. Description of original monument and accessories and/or subsequent restoration:

E-3	1837	GLO	Whitcomb	Set Post
		Kent Co. Wits		Iron in Mon. Box
	1973	LCRC #536	Spicer	1/2" Iron in Mon. Box
	1982	LCRC #2650	Jonker	Set Kent County Monument in Mon. Box
	1994	LCRC #7560	J. Glaza	Kent County Monument

P.A. 345 1990 KENT COUNTY  
PEER APPROVED 2/25/99  
CHAIRMAN Harry Huber

The position of this corner was previously approved by the Kent County Remonumentation Peer Group, monumented by Robert J. Jonker on 2-4-82 and was recorded per LCRC #2650.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

E-3	Found Kent County Monument (Harrison) per witnesses from above LCRC as set by Robert J. Jonker in place of the 1/2" Iron he found in a Mon. Box. Said Iron checks with Kent Co. Wits. and LCRC #536.		
LCRC #2650	LCRC #7560		
Nail & Remon. tag P. Pole	N40°W 59.80'	Nail & Remon. tag P, Pole	N40°W 59.78'
Nail & Remon. tag 18" Spruce	S56°W 61.84'	NW corner house foundation	S26°E 155.70'
Nail & Remon. tag 22" Maple	S25°W 87.26'	C/L stop sign	N80°E 63.40'
NW corner house foundation	S26°E 155.70'	Nail & Remon. tag 24" Hemlock	S58°W 66.84'
C/L stop sign	N75°E 62.0'	Cut "X" in concrete culvert	S52°E 75.90'
		On C/L "X" of pavement	

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-3	Standard Kent County Monument in Mon. Box
Nail & KC Remon. tag NE side P. Pole	N40°W 59.75'
NW corner house foundation	S26°E 155.70'
Nail & KC Remon. tag NW side 26" Hemlock	S58°W 66.84'
"X" cut on top of concrete culvert	S52°E 75.90'
"X" cut on top of concrete culvert	N40°E 73.24'
On C/L "X" of pavement	



Signed by Kirk Breitels  
Surveyor's Michigan License No. 30077

Date 2/25/99