

SURVEY & REMONUMENTATION

MAY 16 1996

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

LIBER

1 1458

For corners in **COMMISSION**
Kalamazoo
(County)

Located In:

Corner Code #

Kalamazoo Twp.

- | | | | |
|--------------------------------------|---------------|----------------|-------------|
| 1. Public Land Survey | T <u>2</u> S. | R <u>11</u> W. | <u>K-03</u> |
| | T _____ | R _____ | _____ |
| | T _____ | R _____ | _____ |
| | T _____ | R _____ | _____ |
| 2. Property Controlling in Section | S _____ | T _____ | R _____ |
| | S _____ | T _____ | R _____ |
| 3. Miscellaneous Property in Section | S _____ | T _____ | R _____ |
| | S _____ | T _____ | R _____ |


CLERK-REGISTER

James [Signature]

STATE OF MICHIGAN
COUNTY OF KALAMAZOO
RECEIVED FOR RECORD
96 MAR 25 PM 3 30

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

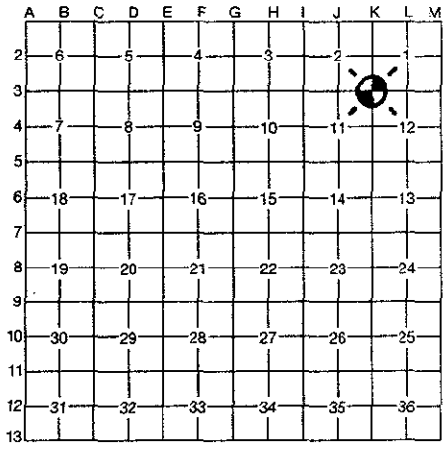

I, Robert E. Snell, in a field survey on February 14, 19 96, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- 1827: United States Government Surveyors; set post, corner to Sections 1, 2, 11 and 12.
 W. Oak 20" N. 65° W. 64 lks.
 W. Oak 18" N. 80° E. 29 lks.
- 1884: F. Hodgman, County Surveyor; found stake standing in fence line. No bearing trees left. Set post with stone under and around.
 Wh. Oak 7" S. 08½° W. 25½ lks.
 Hickory 10" N. 87½° W. 19 lks.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- 1958: Wilkins & Wheaton Engineering Co.; found tile, place of beginning of Olivet Heights recorded in L-20, P-15 of plats.
 Tile in fence line.
 Hickory 15" N. 57° W. 11.6'
 Oak 14" N. 60° W. 19.95'
 Oak 14" N. 20° E. 29.35'
 Oak 14" N. 80° E. 13.35'
 Oak 20" N. 80° E. 37.85'

RATIFIED
BY KALAMAZOO COUNTY
REMONUMENTATION
PEER GROUP
3-21-96

[Signature]

- 1996: Found tile 2" above surface and about 55' North of and at right angles to Spring Valley Park Road.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- K-03: Southwest corner, Section 1, T. 2 S., R. 11 W., Ratified by the Kalamazoo County Remonumentation Program Peer Group on March 21, 1996 and is accepted as a careful and faithful perpetuation of the position of the original corner. Found 3" round tile with "x" on top as set in 1884 Remonumentation survey by F. Hodgman, County Surveyor. Placed Remonumentation sleeve over tile.
- | | | | |
|--|--------------|-----------|--------|
| PK Nail in East Side | 28" Oak | N. 22° E. | 29.57' |
| PK Nail over Exist. Nail/Tab (MSHD) in N. Side | 26" Oak | N. 84° E. | 13.86' |
| PK Nail over Exist. Nail/Tab (MSHD) in N. Side | 7" W. Cherry | S. 80° E. | 4.52' |
| PK Nail in South Side | Twin 18" Oak | S. 78° W. | 40.42' |
| Nail/Tab in East Side | 28" Oak | N. 30° W. | 20.85' |

Signed by Robert E. Snell
Surveyor's Michigan License No. 9734

Date 3-25-96