

**SURVEY & REMONUMENTATION**

AUG 06 1996

**COMMISSION LAND CORNER RECORDATION CERTIFICATE**

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in Kalamazoo  
(County)  
Pavilion Twp.

Located In:

Corner Code #

- |                                      |                              |             |
|--------------------------------------|------------------------------|-------------|
| 1. Public Land Survey                | T <u>3</u> S. R <u>10</u> W. | <u>H-05</u> |
|                                      | T _____ R _____              | _____       |
|                                      | T _____ R _____              | _____       |
|                                      | T _____ R _____              | _____       |
| 2. Property Controlling in Section   | S _____ T _____ R _____      | _____       |
|                                      | S _____ T _____ R _____      | _____       |
| 3. Miscellaneous Property in Section | S _____ T _____ R _____      | _____       |
|                                      | S _____ T _____ R _____      | _____       |

CLERK - REGISTER


*James J. [Signature]*

STATE OF MICHIGAN  
COUNTY OF KALAMAZOO  
RECEIVED FOR RECORD  
96 MAY 23 PM 1 47

LIBER 1PAGE1499  
Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, Robert E. Snell, in a field survey on March 18, 19 96, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

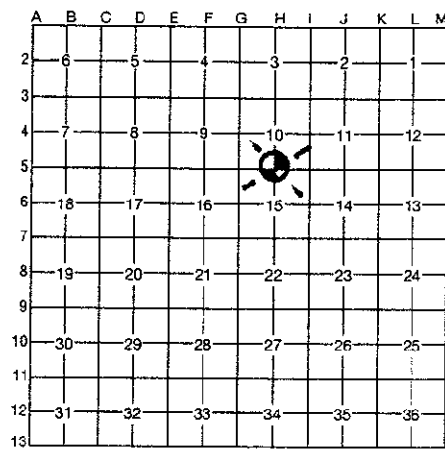

**NOTE:** Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

**A. Description of original monument and accessories and/or subsequent restoration:**

- 1826: United States Government Surveyors; set 1/4 Section post common to Sections 10 & 15.  
 W. Oak 12" N. 24° E. 126 lks.  
 W. Oak 16" S. 29° W. 45 lks.
- 1889: F. Hodgman, County Surveyor; found stake hole N. 29° E. 45 lks. from stump of W. Oak bearing tree. Set post.  
 Maple 2" S. 30° W. 61 lks.  
 Cherry 2" S. 88° W. 36½ lks.

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**

- 1938: Wilkins & Wheaton Engr. Co.; found tile 12" deep.  
 12" Hickory West 22.1'  
 16" Oak N. 45° W. 45.15'  
 12" Maple S. 30° W. 39.76'  
 18" Oak N. 85° W. 29.15'
- 1996: Found ½" x 18" iron rod along side of tile. Tile is 8" deep in stones.

**RATIFIED**  
**BY KALAMAZOO COUNTY**  
**REMONUMENTATION**  
**PEER GROUP**  
4-18-1996

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

- H-05: 1/4 Post common to Sections 10 and 15, T. 3 S., R. 10 W., Ratified by the Kalamazoo County Remonumentation Program Peer Group on April 18, 1996, and is accepted as a careful and faithful perpetuation of the position of the original corner. Found 3" round tile with cross on top as set by F. Hodgman, County Surveyor in a remonumentation survey in 1889. Placed remonumentation sleeve in concrete in monument box over tile.
- |                                      |           |         |
|--------------------------------------|-----------|---------|
| PK Nail on East Side of Power Pole   | S. 20° W. | 102.04' |
| PK Nail on South Side of 18" Hickory | S. 60° W. | 44.47'  |
| PK Nail on North Side of 20" Hickory | N. 70° W. | 44.00'  |
| PK Nail on East Side of 23" Hickory  | N. 10° W. | 73.93'  |

Signed by Robert E. Snell  
Surveyor's Michigan License No. 9734

Date 5-23-96