

# LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: Lake _____ (County) _____	Located In T _____ R _____ T _____ R _____	Corner Code # _____ _____ S 24 T 19N R 13W 14 S 24 T 19N R 13W 15 _____ S _____ T _____ R _____ S _____ T _____ R _____
---	--	--


Register of Deeds Stamp & File Number

4. Lot No: \_\_\_\_\_ Recorded Plat: \_\_\_\_\_

5. Private Claims: \_\_\_\_\_

I, Craig W. McVean, in a field survey on August 14, 2001 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

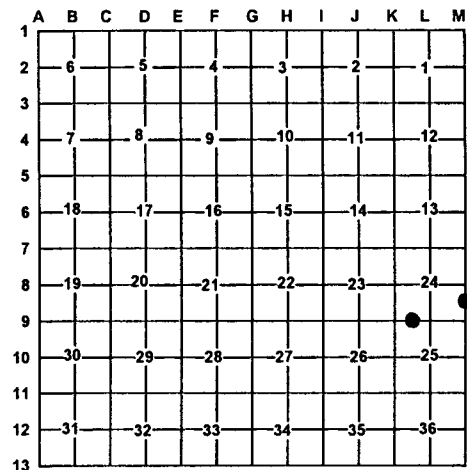

**A. Description of original monument and accessories and/or subsequent restoration:**

14- None



15- Recorded Survey L.1 P. 480- P. Salisbury-1972 shows position  
 -LCRC- L.3, P.76- C.F. Roser-1988. Drove 5/8" X 34" rerod with RLS cap.  
 16" B. Oak N20°W 31.66; 12" B. Oak N50°E 35.10'; Fd. Conc. Monument N7°W 33.78'; CTR E-W Gravel Rd. North 3'; North 33' to set Cedar post with location tag.

**B. Description of corner evidence found and/or method applies in restoring or re-establishing corner:**

14- S 1/16 corner common to section 24, T19N,R13W and section 19, T19N,R12W- Set 2" aluminum cap on 5/8" x 34" rebar per standard BLM procedure. Centerline of North-South two-track is 19.5' West

15- W 1/16 corner common to section 24 and 25 T19W,R13W - Set 2" aluminum cap on 5/8" X 34" Rebar per standard BLM procedure. Centerline East-West gravel road is 7' North.

-Reference point 'H'- Found capped 5/8" rebar per Roser LCRC - N75°51'W 18.51' of '15'. This position is based on rejected position for K9 (Ref. Pt. 'D'). Roser 5/8" capped iron rod not utilized as '15' in this survey. Removed cap and cedar post.

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

14- 2" Aluminum cap on 5/8" X 34" rebar  
 SE 1' to set blue carsonite post w/ loc. tag  
 N4°E 10.98' to set nail and tag in West side of 8" J. Pine  
 S45°E 16.11' to set nail and tag in SW side of 8" J. Pine  
 S44°W 55.46' to set nail and tag in SE side of 3" B. Oak  
 N78°W 36.39' to set nail and tag in N. side of 5" B. Oak

15-2" Aluminum cap on 5/8" X 34" rebar  
 North 33.04' to set Aluminum cap on 5/8" X 34" rebar  
 Online and reset cedar post with location tag along side.  
 N37°W 44.63' to set nail and tag in SW side of 18" B. Oak (CFR)  
 S72°E 54.38' to set nail and tag in SW side UP  
 S12°W 44.38' to set nail and tag in E side of 10" W. Pine  
 N75°15'W 18.51' to Reference point 'H'- 5/8" rebar  
 N29°52'W 43.91' to found concrete monument with 1/2" iron

Signed by: Craig W. McVean  
 Surveyor's Michigan License No.: 33981

Date: 11/26/2001