

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____	T. <u>20</u> ^{N.} <u>●</u> , R. <u>12</u> ^{W.} <u>●</u>	C-10; C-12
2. PROPERTY CONTROLLING IN SECTION <u>30</u>	, T. <u>20</u> ^{N.} <u>●</u> , R. <u>12</u> ^{W.} <u>●</u>	14
3. MISCELLANEOUS PROPERTY IN SECTION _____	, T. _____ ^{N.} _____, R. _____ ^{E.} _____	_____
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Carl F. Roser do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram - over) were, in a field survey on July 1, 1974, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____ 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:


- C-10 Restored corner on line and equidistant between section corners to N & S, which fits two F. Jones witnesses. Corner falls in center of N-S sand road.
- C-12 Reestablished corner per standard B.L.M. instructions.
- 14 Established corner per standard B.L.M. instructions. Corner falls in center of N-S sand road.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-10	C-12	14
Set DNR monument (buried)	Set DNR monument (buried) in	Set 1"x30" pipe (Buried)
3" R. Pine S20°E 70.05	N-S sand road	12" Oak S62°W 59.0
5" R. Pine S52°E 73.30	5" B. Oak N63°W 29.7	15" Oak N45°W 46.5
Set cedar post w/loc. tag	9" B. Oak N55°E 35.5	Set cedar post w/loc. tag
Due W 33'	Set cedar post w/loc. tag	Due W 33'
	Due E 33'	

SIGNED BY Carl F. Roser DATE 8/21/74

SURVEYOR'S MICHIGAN REGISTRATION NO. 12028

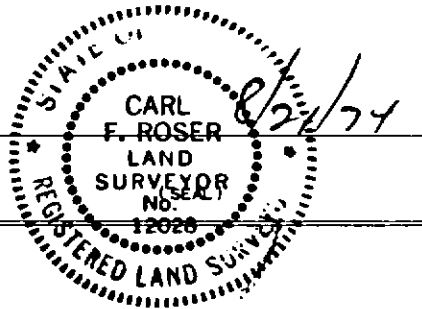

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____
CHIEF OF SURVEY PARTY

APPROVED AND SIGNED BY _____ DATE _____
MICHIGAN REGISTERED LAND SURVEYOR

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. _____ NORTH NEWKIRK TOWNSHIP
 LAKE COUNTY