

SURVEY &
REMONUMENTATION

1993

COMMISSION

REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970


RECEIVED FOR RECORD

93 DEC 22 PM 9:08

LIBER 5
PAGE 32
LAPPEER

For corners in

<u>LAPPEER</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>10N</u> R <u>11E</u>	<u>M-10</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

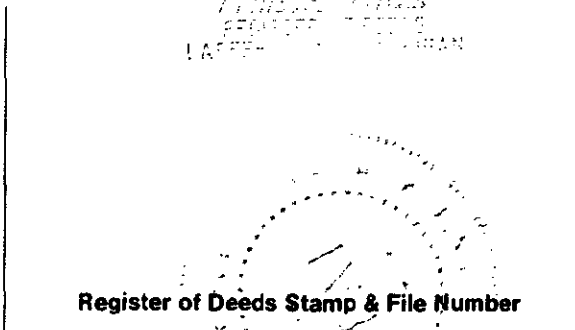

I, Earl E. Gravlin, in a field survey on October, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
M-10. East quarter corner Section 25 History: East and South town lines run by Hervey Parke, 1834. Pages 486 and 487. Subdivision of township run by Hiram Burnham, third quarter, 1834. page 496-498. Witnesses Hemlock 20 S5°W .32 W Oak 20 N36°W .39 set post. County Surveyors Record: Nothing

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
Site conditions: flat farmland Set 1/2" iron on intersection of north south fence and fence to west, 3' south of corner post of meandering fence to east.



C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
October 20, 1993
M-10
Set 1/2" iron with brass cap, on intersection of north south fence and fence to west, 3' south of corner post of meandering fence to east.
N05°E 7.23' NAIL & TAG E SIDE 15" ELM
S85°W 26.05' NAIL & TAG S SIDE 6" ELM
NORTH 3' WOOD CORNER POST
N35°W 4.27 NAIL & TAG S SIDE 4" APPLE

Signed by [Signature] Date 12/02/93
Surveyor's Michigan License No. 23510