


# LAND CORNER RECORDATION CERTIFICATE

**FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970**  
Luce Co. Three Corners

FOR CORNERS OF:-	LOCATED IN:-	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____	T. <u>46</u> N. <u>9</u> E. R. <u>9</u> W.	H-3 H-5 J-5
2. PROPERTY CONTROLLING IN SECTION _____	T. _____ N. _____ E. S. _____ W. R. _____	_____
3. MISCELLANEOUS PROPERTY IN SECTION _____	T. _____ N. _____ E. S. _____ W. R. _____	_____
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

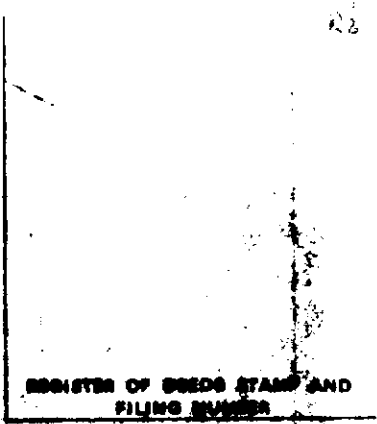

I, Billy D. Buckler do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram - over) were, in a field survey on 9/7 1972, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management, or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on \_\_\_\_\_ 19\_\_\_\_, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

- A. Description of original monument and accessories and/or subsequent restoration:**
- H-3  $\frac{1}{4}$  Corner bet. Secs. 3-10, set by Harvey Mallen, D.S. 1850.  
Bearings were: B. Ash 10" N77 $\frac{1}{2}$ <sup>0</sup>E 86 LKS and Elm 6" S27 $\frac{1}{2}$ <sup>0</sup>E 49 LKS
  - H-5  $\frac{1}{4}$  Corner bet. Secs. 10-15, set by Mallen.  
Bearings were: W. Birch 7" N14<sup>0</sup>E 7 links and Spruce 6" S14<sup>0</sup>W 12 LKS
  - J-5  $\frac{1}{4}$  Corner bet Secs. 11-14, set by Mallen.  
Bearings were: Tam 5" S45<sup>0</sup>E 15 LKS and Tam. 7" S81<sup>0</sup>W 31 links
- B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:**
- H-3 Corner re-established midway and on line bet. two Sec. Cors. No evidence of original Corner.
  - H-5 Corner re-established midway and on line bet. Sec. Cors. No evidence of corner. Found possible Pine Line tree to West.
  - J-5 Corner re-established midway and on line bet. two Sec. Cors. Found no evidence of original corner.
- C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**  
Placed 1" pipe with 4" aluminum cap at all three corners.
- H-3 New Bearings: 6" Twin Soft Maple N57<sup>0</sup>E 24.0' and 8" Soft Maple S41<sup>0</sup>E 7.7'
  - H-5 New Bearings: 10" Cedar N47<sup>0</sup>E 34.4' and 12" Cedar N50<sup>0</sup>W 12.8'
  - J-5 New Bearings: 7" B. Spruce S89<sup>0</sup>E 33.9' and 9" B. Spruce S41<sup>0</sup>E 19.3'

SIGNED BY Billy D. Buckler DATE 11/27/72  
 SURVEYOR'S MICHIGAN REGISTRATION NO. 8887 (SEAL)

FOR STATE AND UNITED STATES AGENCIES:  
 SIGNED BY \_\_\_\_\_ CHIEF OF SURVEY PARTY DATE \_\_\_\_\_  
 APPROVED AND SIGNED BY \_\_\_\_\_ MICHIGAN REGISTERED LAND SURVEYOR DATE \_\_\_\_\_ (SEAL)