


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970 as Amended

For corners in

<u>Luce</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>46N</u> R <u>11W</u>	<u>A3</u>
	T <u>46N</u> R <u>12W</u>	<u>M3</u>
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

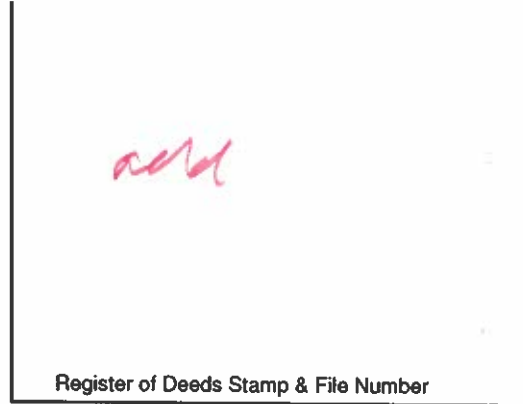

I, Stephan J. Szyszkoski, in a field survey on 08/06/2008 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

(A3) Corner common to Sections 6-7 T46N-R11W and Sections 1-12 T46N-R12W. 1841 - Established by Wm.A.Burt Deputy Surveyor. Set post. Beech 12" N14E 9 links, Fir 14" N60W 15 links. 1961 - Note by J.Halbach of Michigan Dept. of Natural Resources in old field book: " Stake set by J.McLaren of CCI on 4/53 (beside old rotten iron scribed post on ground)". Further note by L.Rubick of MDNR states that this was a corner by H.Lawrence.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

(A3) The original post and accessories were not recovered. Found a fence post with remains of old wood post alongside which checks reasonably well by bearing and distance to township corners N 00d 02'04" W, 5207.92' and S 00d 01'04" E, 26402.30'. Accepted the post as the best available evidence of the position of the original corner. Removed it and drove a monument at its position. A 27" Maple S73W with old overgrown blazes faces the corner, as does a large dead Beech, blazed, N22E.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

(A3) Set 1"IDx36" I.pipe with 4" alum. MDNR cap. Set measuring nail with MDNR tag in the side of:
 16" Maple N73W 13.83' mrkd "S1 NBT"
 27" Maple S73W 19.38' "S12 NBT"
 14" Maple S52E 26.63' "S7 NBT"
 12" Maple N33E 31.43' "S6 NBT"
 Bearings are magnetic.



Signed by Stephan J. Szyszkoski Date 09/25/2008
 Surveyor's Michigan License No. 33986

For the Michigan Department of Natural Resources, Office of Land and Facilities