

**LAND CORNER RECORDATION CERTIFICATE**  
 Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

LUCE  
 \_\_\_\_\_  
 (County)

Located In:	Corner Code #
1. Public Land Survey	T <u>46N</u> R <u>12W</u> <u>03</u>
	T _____ R _____
	T _____ R _____
	T _____ R _____
2. Property Controlling in Section	S _____ T _____ R _____
	S _____ T _____ R _____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____
	S _____ T _____ R _____

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

Sep 22 2004

I, Stephan J. Szyszkoski, in a field survey on \_\_\_\_\_, 19\_\_\_\_ do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below:


**NOTE:** Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3			●									
4	7		8		9		10		11		12	
5												
6	10		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

**A. Description of original monument and accessories and/or subsequent restoration:**  
 (D3) Quarter corner common to Sections 5-8. 1851: Established by Francis Colman midway between Section corners 40.02 ch. east and west. Set qr. sec. post. Y.Pine 12 N52E 50 links, Y.Pine 12 S27W 16 links. 1952: Remonumented by Dean C. DeLaMater from the original 8Ts, still in place, one good condition, one fair. Set 1" I.pipe with 4" brass cap. No witness trees available.

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**  
 (D3) Found the 1952 monument, top bent over, at the base of an old wood post. Accepted same as a careful and faithful perpetuation of the position of the original corner. Removed the 1952 monument and placed a new one at its position. The original 8Ts were not recovered. The corner falls on south side of road. Roughly measured to adjacent section corners and found distances 2680' west and 2628' east.

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**  
 (D3) Set 1"IDx36" I.pipe with 4" alum. MDNR cap. Set nails and tags in:  
 8" R.Pine S64N 61.1'    mkd "1/4S N8T"  
 12" Maple S85W 34.85'    do  
 6" R.Pine S05E 72.05'    do  
 6" J.Pine S35E 71.3'    do  
 Bearings are magnetic. Distances are to nail with tag.

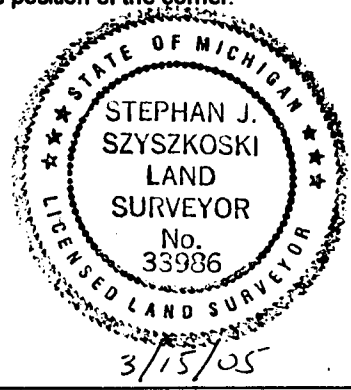

Signed by Stephan J. Szyszkoski  
 Surveyor's Michigan License No. 33986

Date 3/15/05