




July 12, 1994

M-07 T3N - R5E: Northeast Corner, Section 24, Oceola Township

We found a 1/2" iron 2 feet east of the centerline of Hacker Road (gravel) and 4.5 feet south of the centerline of Brophy Road (gravel). The GLO calls for a jog of 124.1 feet, and the presently measured distance is 179.77 feet (Boss 1979). The corner was originally recorded as being set by Alex Holmes for the GLO in 1815. There are no recorded Act 74s for this corner. There were no discrepancies found in record measures of this point. A sweep of the area near this iron did not reveal any other corner markers. This corner is in a fairly open area and is occupiable with GPS. I recommend accepting M-07, the Northeast Corner of Section 24, Oceola at the location as is presently monumented.

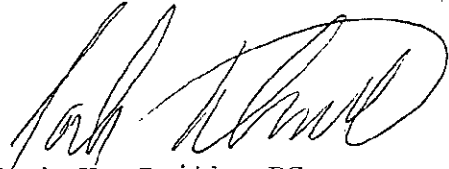

Jack K. Smith, PS  
Desine Inc.

