

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in


Mackinac

(County)

Located In:

Corner Code #

- | | | | | | | | | |
|------------------------------------|---|-----------|---|------------|-----|------------|-----|-----------|
| 1. Public Land Survey | T | ___ | R | ___ | ___ | | | |
| | T | ___ | R | ___ | ___ | | | |
| | T | ___ | R | ___ | ___ | | | |
| | T | ___ | R | ___ | ___ | | | |
| 2. Property Controlling in Section | S | <u>31</u> | T | <u>44N</u> | R | <u>12W</u> | ___ | <u>14</u> |
| | S | <u>31</u> | T | <u>44N</u> | R | <u>12W</u> | ___ | <u>7</u> |
| 3. Miscellaneous | S | ___ | T | ___ | R | ___ | ___ | ___ |
| Property in Sec. | S | ___ | T | ___ | R | ___ | ___ | ___ |

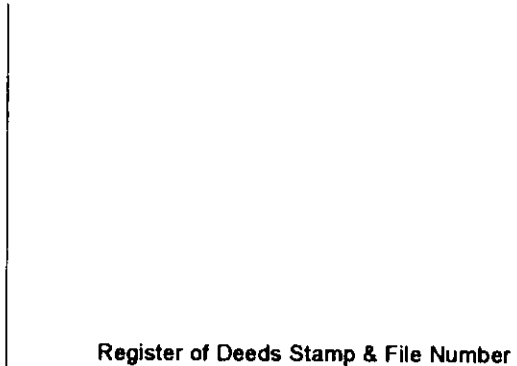

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

7 Mar 16 2004
 14 Jun 28 2004

I, Stephan J. Szyszkoski, in a field survey on _____, 19____ do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below.

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

1	A	B	C	D	E	F	G	H	I	J	K	L	M
2		6		5		4		3		2		1	
3													
4		7		8		9		10		11		12	
5													
6		18		17		16		15		14		13	
7													
8		19		20		21		22		23		24	
9													
10		30		29		28		27		26		25	
11													
12		31		32		33		34		35		36	
13													

A. Description of original monument and accessories and/or subsequent restoration:
 (14-Sec. 31) South 1/16 corner between Sections 31 and 32. Not established in the original survey.
 (7-Sec. 31) North 1/16 corner between Sections 31 and 32. Not established in the original survey.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

(14-Sec. 31) Established the corner midway and on line between Quarter and Section corners, 1310.79' north and south. The corner falls in a large grass marsh.
 (7-Sec. 31) Established the corner midway and on line between Section and Quarter corners 1310.93' north and south.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

(14) Set 1"IDx36" I.pipe with 4" alum. MDNR cap. Set measuring nails in: 10" Cedar stump S68W 52.8' no marks 10" Cedar stump S57W 101.75' do 12" dead Cedar S66E 146.9' do 10" dead Cedar East 107.95' do Bearings are magnetic. Distances are to nail with tag.	(7) Set 1"IDx36" I.pipe with 4" alum. MDNR cap. Blazed, scribed, and set measuring nails in: 8" Maple S58W 23.9' "N1/16 8T" 14" Maple N45W 18.6' do 8" twin Maples N25E 20.75' do 6" Y.Birch N54E 73.2' do Bearings are magnetic. Distances are to nail with tag.
---	--



Signed by Stephan J. Szyszkoski
 Surveyor's Michigan License No. 33986

Date 7/8/04