

SURVEY & REMONUMENTATION

APR 29 1996

COMMISSION LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970


For corners in

Macomb	Located In:	Corner Code #F3
(County)	ErinLake Township	
1. Public Land Survey	T <u>1N</u> R <u>13E</u>	<u>F3</u>
	T <u> </u> R <u> </u>	<u> </u>
	T <u> </u> R <u> </u>	<u> </u>
	T <u> </u> R <u> </u>	<u> </u>
2. Property Controlling in Section	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
3. Miscellaneous Property in Sec.	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
	S <u> </u> T <u> </u> R <u> </u>	<u> </u>

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Craig P. Amey, in a field survey on August 7, 1995 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

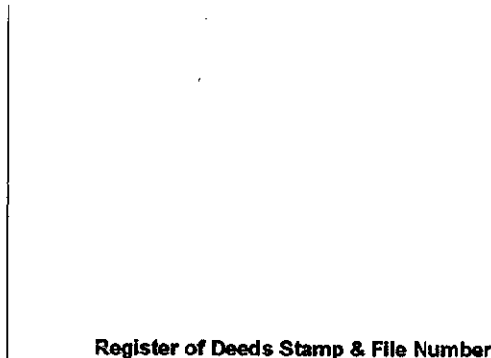

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5			4		3		2		1	
3						●							
4	7		8			9		10		11		12	
5													
6	18		17			16		15		14		13	
7													
8	19		20			21		22		23		24	
9													
10	30		29			28		27		26		25	
11													
12	31		32			33		34		35		36	
13													

A. Description of original monument and accessories and/or subsequent restoration:

1818 GLO		William Preston	No witnesses remain
1992 LCRC	L5700 P478	Warren C. Avey	Found 5/8" bar in a monument box

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 5/8" bar in a monument box at the intersection of southbound Gratiot Avenue and 13 Mile Road (Asphalt)

This corner verified by:

Witnesses from LCRC, L5700 P478

ESE	47.44	PK Nail in the SE side of a utility pole
NE	66.36	PK and shiner in the SW side of a utility pole

E	2699.58'	Southeast corner of section 4 (G3) (GLO = 40ch)
W	2698.68'	Southwest corner of section 4 (E3) (GLO = 40ch)

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

REPLACED 5/8" IRON WITH 3/4" X 24" IRON WITH MCR CAP #34970 IN THE EXISTING MONUMENT BOX

AZ	58°	67.27	Set PK and MCR tag in the NW face of a utility pole
AZ	150°	51.35	Found a Chiseled "X" in the north face of an aluminum light pole
AZ	317°	72.62	Top of a hydrant
AZ	238°	96.10	Top of a hydrant



The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

ACCEPTED BY THE MACOMB COUNTY SURVEY PEER
GROUP AS THE OFFICIAL CORNER UNDER MICHIGAN
PUBLIC ACT 345 OF 1990 AT A MEETING HELD
ON 8-15-95
William E. Soderberg
WILLIAM E. SODERBERG, P.S., CHAIRMAN

Signed by C.P.A. Date 12-15-95
Surveyor's Michigan License No. 34970

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971

REVISED MAY 14, 1975