

**LAND CORNER RECORDATION CERTIFICATE**  
 Filing Requirement of Act 74, Mich. P.A. 1970

**SURVEY &  
 REMONUMENTATION**

For corners in

MACOMB  
 (County)


Located In:  
 LENOX TOWNSHIP

Corner Code #

APR 07 1998

SECTION

- |                                       |       |                     |             |
|---------------------------------------|-------|---------------------|-------------|
| 1. Public Land Survey                 |       | <u>T 4 N R 14 E</u> | <u>A-10</u> |
|                                       |       | T ___ R ___         | _____       |
|                                       |       | T ___ R ___         | _____       |
|                                       |       | T ___ R ___         | _____       |
| 2. Property Controlling<br>in Section | S ___ | T ___ R ___         | _____       |
|                                       | S ___ | T ___ R ___         | _____       |
| 3. Miscellaneous<br>Property in Sec.  | S ___ | T ___ R ___         | _____       |
|                                       | S ___ | T ___ R ___         | _____       |

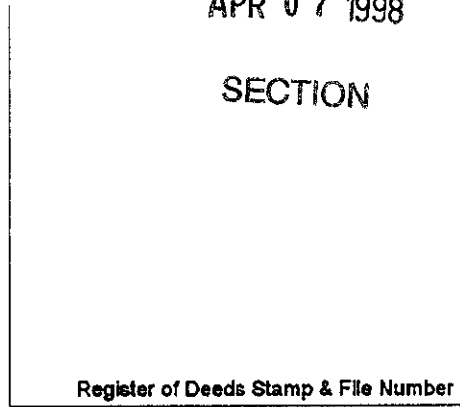

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

I, ROBERT H. BIRKETT, in a field survey on JULY 22, 1997 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		

**A. Description of original monument and accessories and/or subsequent restoration:**

CORNER WAS NOT SET BY THE GENERAL LAND OFFICE  
 1974, H. KOBS, No. 14097, FOUND 1/2" IRON BAR, SURVEY L. 2560, P. 119.

ACCEPTED BY THE MACOMB COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER MICHIGAN PUBLIC ACT 345 OF 1990 AT A MEETING HELD ON 11-4-97  
*William E. Soderberg*  
 WILLIAM E. SODERBERG, P.S., CHAIRMAN

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**

FOUND 1/2" IRON (700' +/- WEST OF OMO ROAD) IN AN EAST AND WEST RUNNING WOVEN WIRE FENCE, WITH NO OCCUPATION NORTH OR SOUTH..

MONUMENT MATCHES THE WITNESSES (SECTION "C") OF THE ABOVE DESCRIBED DOCUMENTS (SECTION "A").

DISTANCES A-10 TO A-9  
 G.L.O. 40 CHAINS  
 FIELD (GRID) 2723.20 FEET

DISTANCES A-10 TO A-11  
 G.L.O. 40 CHAINS  
 FIELD (GRID) 2680.67

COMMON WITH M-10 RAY TOWNSHIP, T. 4 N., R. 13 E.

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

REMOVED 1/2" IRON AND REPLACED WITH A 36" IRON, ENCASED IN 4" CONC. WITH 2" DIAMETER ALUMINUM CAP STAMPED "MACOMB COUNTY MONUMENT MI ACT 345 M-10, A-10, 41094"

- AZ. 85° - 115.71' - FOUND P.K. NAIL IN SOUTH FACE 12" ASH.
- AZ. 90° - 34.45' - FOUND P.K. NAIL IN SOUTH FACE 30" OAK.
- AZ. 175° - 355.09' - SET P.K. W/MONUMENTATION TAG IN W. FACE 14' ASH LOC. IN NORTH AND SOUTH RUNNING DITON
- AZ. 270° - 27.16' - FOUND FORM NAIL IN NORTH FACE TWIN 12" ASH.

Signed by *Robert A. Birkett* Date 12/10/97  
 Surveyor's Michigan License No. 41094



712