

1993

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

COMMISSION

For corners in
Manistee

(County)

Located In:

Corner Code #

- | | | | | | |
|------------------------------------|---|-----|---|-----|------|
| 1. Public Land Survey | T | 21N | R | 13W | L-11 |
| | T | | R | | |
| | T | | R | | |
| | T | | R | | |
| 2. Property Controlling in Section | S | | T | R | |
| | S | | T | R | |
| 3. Miscellaneous Property in Sec. | S | | T | R | |
| | S | | T | R | |

REGISTER'S OFFICE
MANISTEE COUNTY
93-261 AT 10:27 A.M.
MAY - 7 1993

Penney A. Pepera
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, Norman C. Caldwell, in a field survey on September, 1992, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:


NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

L-11 Post placed by J. Brink, 1838
7" P. Pine S79°E 41 lks. (27.06')

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- L-11 1/4 cor., Sec. 25 & 36, T21N-R13W
- County Surveyor J.H. Millard, 1907 Mon. not given
N28°E 13.86' 7" B. Oak
N74°E 19.47' 6" B. Oak
- Robert Griffin, L. 73, P. 73 June 1973
Set USFS Mon. w/Brass cap
N57°E 85.00' 10" dock spike SE fc. 7" B. Oak
S8°W 26.40' 16" spike in E side fnc corner post
N28°W 78.05' 10" dock spike NE fc 8" W Oak
N3°E 30.35' 16" spike in W. side fnc corner post
- James W. Granger, Liber 73, pg. 13, March 1973
Fnd. temporary spike
N28°W 78.05' 14" W. Oak
N59°W 123.85' 6" W. Oak
North 33.00' 6" Forest Land Marker

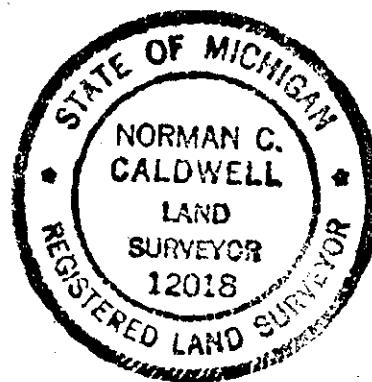

Corner L-11 ratified by the Manistee County Peer Group pursuant to P.A. 123 of 1915, as amended, of Michigan, P.A. 1990, as amended. Date of Peer Ratification: APRIL 5, 1993

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- L-11 1/4 Cor., Sec. 25 & 36, T21N-R13W
- Record mon. destroyed by construction, replaced with 5" x 5" square conc. post with brass tablet by record refs.
N50°W 126.83' 14" W. Oak
N30°W 78.05' 12" W. Oak (R)
N26°E 136.83' 4" R. Maple
N61°E 85.00' 12" B. Oak (R)
North 33.00' Carsonite Witness Post

Signed by Norman C. Caldwell

Date 12 JAN 93

Surveyor's Michigan License No. 12018