


# LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In:  
Manistee  
 (County)

		Located In		Corner Code #
1. Public Land Survey		T _____	R _____	_____
		T _____	R _____	_____
2. Property Controlling in Section	S <u>29</u>	T <u>24N</u>	R <u>13W</u>	<u>5</u>
	S <u>29</u>	T <u>24N</u>	R <u>13W</u>	<u>6</u>
3. Miscellaneous Property in Section	S _____	T _____	R _____	_____
	S _____	T _____	R _____	_____

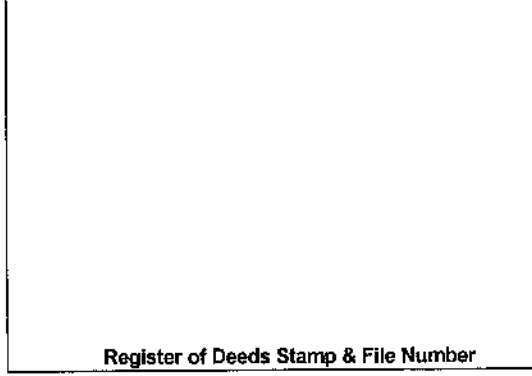

4. Lot No: \_\_\_\_\_ Recorded Plat: \_\_\_\_\_

5. Private Claims: \_\_\_\_\_

I, Craig W. McVean, in a field survey on Sept. 14, 2006 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6			5		4		3		2		1	
3													
4	7			8		9		10		11		12	
5													
6	18			17		16		15		14		13	
7													
8	19			20		21		22		23		24	
9													
10	30			29		28		27		26		25	
11													
12	31			32		33		34		35		36	
13													

A. Description of original monument and accessories and/or subsequent restoration:

5 - None

6 - None



B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

5 - CN 1/16, Sec. 29 - Set 2" Alum. Cap on 5/8" x 34" rebar per Standard BLM procedure. N. Bank of Creek - Coarse West is 107' South

6 - NE 1/16, Sec. 29 - Set 2" Alum. Cap on 5/8" x 34" rebar per Standard BLM procedure. Corner of down fences N, S & E is 7'± N. and 14' ± West. Centerline of N-S Powerline is 36' East.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

5 - Stamped 2" Alum. Cap on 5/8" x 34" rebar  
 N78°W 24.25' to set N & T in N. side Tw. 10" Cherry  
 S20°W 59.32' to set N & T in E. side 8" S. Maple  
 S20°E 58.51' to set N & T in E. side 4" S. Maple  
 S54°E 51.04' to set N & T in SW side 5" Ash  
 Set Blue Carsonite Post w/ loc. tag 1' SW

6 - Stamped 2" Alum. Cap on 5/8" x 34" rebar  
 Set Blue Carsonite Post w/ loc. tag 1' SW  
 N31°E 67.89' to set N & T in SE side P.P.  
 N17°W 60.19' to set N & T in E. side 8" Cherry  
 N27°W 69.85' to set N & T in W. side 10" Scotch Pine  
 S69°W 65.83' to set N & T in N. side 6" Cherry

Signed by: Craig W. McVean Date: 1/25/2007  
 Surveyor's Michigan License No.: 39088