

SURVEY & REMONUMENTATION

JAN 23 2001

SECTION _____


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners In: Located In: Corner Code #

Mason County

Public Land Survey	T 17N	R 17W	M-12
	T 17N	R 16W	A-12 ✓
	T	R	
	T	R	
Property Controlling in Section	S	T	R
	S	T	R
Miscellaneous Property in Sec.	S	T	R
	S	T	R

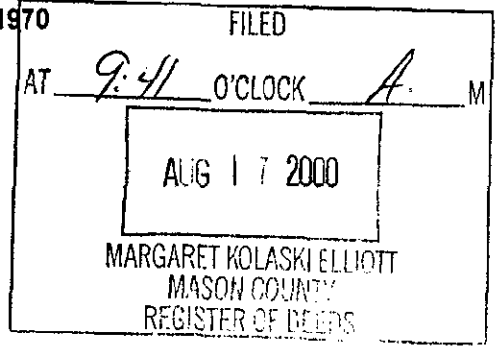

Register of Deeds Stamp & File Number

Lot No. _____ Recorded Plat _____
Private Claims _____

Kenneth L. Ross, in a field survey on May 5, 2000, Do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	X 31	32	33	34	35	36	X						
13													

Corner common to section 31 of T.17N., R.16W. and section 36 of T.17N., R.17W.

Description of original monument and accessories and/or subsequent restoration:

Fullert & Brookfield set post
Cedar 5 N76W 10 (6.60') #1
Cedar 6 S57W 37 (24.42') #2

Loss L431, P293
X. 1/2" rebar
no witness given

Description of corner evidence found and/or method applied in restoring or reestablishing corner:

found a 1 1/2" pipe with a 5/8" iron rod driven into the center inside an existing monument box. Corner is in center of N-S road and 4' south of centerline of road to the East.

Condition of witnesses: 1 and 2 are gone.

found nothing to dispute the location of this corner.

Description of monument for corner and accessories established to perpetuate locating the position of the corner:

left the 1 1/2" pipe and 1/2" iron rod in the monument box intact and accepted this as a careful and faithful reestablishment of the position of the original corner.

TR tie corner fence post S55E 43.95' ex. 60d spike on south side
TP S65W 37.48' Ex. 60d spike on south side.
X. in PLS 17634 S08E 226.90'
Distance North to M-11=2651.38'
Distance South to M-13 = 2616.30'



Signed by Kenneth L. Ross Date 8-10-2000
Surveyor's Michigan License No. 17634

Approved by Peer Review Group on 8-10-2000
Kenneth L. Ross, County Representative [Signature]

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1976
REVISED JAN., 1983
ADAPTED FOR WORD PROCESSING MARCH, 1993