

**SURVEY &
REMONUMENTATION**

JAN 28 2001


SECTION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners In: Located In: Corner Code #
Mason County

- 1. Public Land Survey T 17N R 16W B-3
T R
T R
T R
- 2. Property Controlling S T R
in Section S T R
- 3. Miscellaneous S T R
Property in Sec. S T R
- 4. Lot No _____ Recorded Plat _____
- 5. Private Claims _____

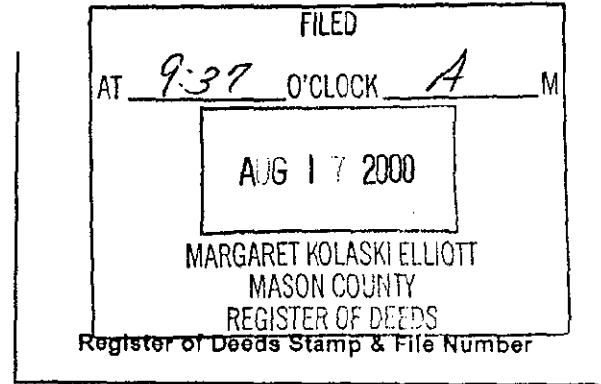

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3	7	8	9	10	11	12							
4													
5	18	17	16	15	14	13							
6													
7	19	20	21	22	23	24							
8													
9	30	29	28	27	26	25							
10													
11	31	32	33	34	35	36							
12													
13													

I, Kenneth L. Ross, in a field survey on May, 5, 2000, Do hereby certify that under requirements of P.A.74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

¼ Corner common to sections 6 and 7 of T.17N., R.16W..

A. Description of original monument and accessories and/or subsequent restoration:

GLO Hodgson 1838 set post
Beech 8" N47W 32 lks (21.12') #1
Beech 6" S59E 12 lks (7.92') #2

Ross August 2, 1982 Set iron at Power Pole at approximate location of B-3
No witnesses were taken.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

I found the iron by Ross that was set in 1982 but ignored this iron as there was no solid basis to set this iron other than the occupation from the power line, i.e. no fences or evidence of occupation, so I set the corner by single proportionate measurement between A-3 and C-3 of T17N, R16W. I found nothing to dispute the location of this corner.


The condition of the witnesses 1 and 2 are gone.

I found nothing to dispute the location of this corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

I set at the surface of the ground, by single proportionate measurement a 4" x 18 ½" Harrison cast iron monument stamped "Mason County Monument". I accepted this as a careful and faithful reestablishment of the position of the original corner.

Distance West to A-3 2555.14'
Distance East to C-3 2623.34'
Ex. ½" iron S32W 8.05'
8" maple N90E 46.78' (set 60d S. side)
PP S25W 6.95' (Set Mag Nail on E. side)
12" Maple N35W 77.40' (set 60d on SW side)



Signed by [Signature] Date 8-10-2000
Surveyor's Michigan License No. 17634

Approved by Peer Review Group on 8-10-2000
Kenneth L. Ross, County Representative [Signature]

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1978
REVISED JAN., 1983
ADAPTED FOR WORD PROCESSING MARCH, 1993