

1993

COMMISSION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970


For corners in

Located In: _____ Corner Code # _____

1. Public Land Survey T 17NR 16W F-3 6-4
 T _____ R _____
 T _____ R _____
 T _____ R _____

2. Property Controlling S _____ T _____ R _____
 in Section S _____ T _____ R _____

3. Miscellaneous S _____ T _____ R _____
 Property in Sec. S _____ T _____ R _____

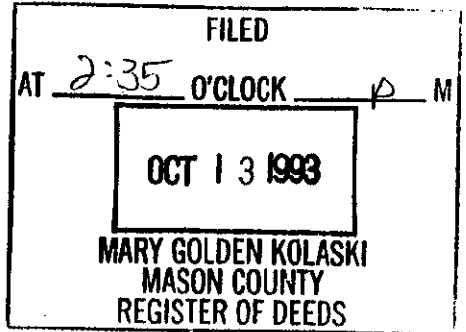

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____

5. Private Claims _____

I, Kenneth L. Ross, in a field survey on OCTOBER, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

F-3 1/4 Corner, Secs. 4 & 9
1838 John Hodgeson set Post
10" Hemlock for corner
no witness

G-4 1/4 Corner, Secs. 9 & 10
1838 John Hodgeson set Post
18" Beech S 63 E 27 lks
17" Beech N 45 E 33 lks

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

F-3 1/4 Corner, Secs. 4 & 9
Ross 1988 Fd 1/2" re-rod
24" Maple S 50 W 59.35'
28" Tw. Maple S 05 W 60.93'
28" W. Oak N 50 E 33.85'
Fence to South
Dist to NW cor = 2658.89'
Dist to NE cor = 2666.17'


G-4 1/4 Corner, Secs. 9 & 10
Ross 1973 Fd nail on E-W fence line no witness
Ross 1988 Fd 1/2" Iron on Pavement no witness

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

F-3 1/4 Corner, Secs. 4 & 9
Found 1/2" re-bar w/large piece of flat iron next to it, in North 1/2 of dirt/gravel rd. Fd existing witness, replaced with 5/8" X 36" re-bar with 2 1/2" alum. cap set 0.8' below road surface 3' South of N. edge of road, and is accepted as the best available evidence of the original corner.
30" Maple N 07 W 66.66'
28" W. Oak N 53 E 33.66'
28" Tw. Maple S 14 W 60.88'
24" Maple S 53 W 59.29'
Ross Cap Iron South 33.02'

G-4 1/4 Corner, Secs. 9 & 10
Found 1/2" Iron rod in pavement, replaced with 5/8" X 24" re-bar with 2 1/2" alum. cap also placed monument box Iron set 0.3' below road surface in monument box, and is accepted as the best available evidence of the original corner
P. Pole N 80 W 39.24'
P. Pole S 06 W 430.10'
30" W. Pine S 72 E 142.48'
4" J. Pine S 73 W 153.79'

Signed by _____
Surveyor's Michigan License No. _____



Date 10-12-93

Peer Group Reviewed
and Approved
Date: 10-12-93
Kenneth L. Ross
Mason County Surveyor