


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

- | | | |
|--|-----------------------|----------------|
| MASON
(County) | Located In: | Corner Code // |
| 1. Public Land Survey | T 17N. R 17W | I-4 |
| | T R | |
| | T R | |
| | T R | |
| 2. Property Controlling
in Section | S T R | |
| | S T R | |
| 3. Miscellaneous
Property in Sec. | S T R | |
| | S T R | |
| 4. Lot No. , Recorded Plat | | |
| 5. Private Claims | | |

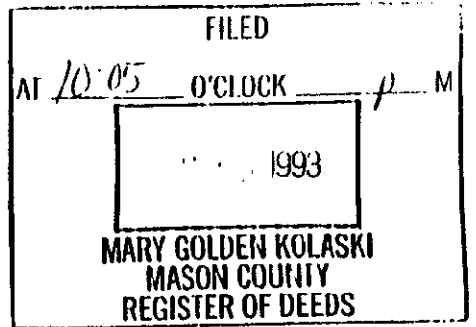

Register of Deeds Stamp & File Number

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2								
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

I, **John Schulke** in a field survey on **Sept. 16** 19 **93**
do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Original survey established in 1838 by Hogenson.
Set a wooden post with the following references:
Bearings trees: Beech 18" N53°W 29 lks.
Beech 10" S40°E 18 lks.

In 1877, J.A. Mitchell found stumps of old trees (see Co. Surveyor Record Book 1, page 47).
Planted stake at the corner. The following bearing trees: Beech 10" S67½°W 62 lks.
Beech 10" S86°E 66 lks.

In 1888, Metcalf indicated previous survey and testimony (see Mason Co. Surveyor Record Book 1, page 204). The following bearing trees:

Beech 16" S86°45'E 66 lks.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found bent 1" dia. iron pipe and broken glass.
Accepted recovered pipe as the best available evidence of the perpetuated location of the original corner.


Beech 14" N42°30'E 66 lks.

In 1975, Mason Co. Road Commission indicated a 2" dia. pipe-top bent. The following corner references:
Tel. pole East 20.85 ft.
Blk. Lucust S20°E 58.30 ft.
sign post S45°W 47.33 ft.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Replaced iron pipe with 5/8" dia. X 24" rebar with an aluminum County cap stamped to identify the corner. The following corner references:
Spruce 8" N85°E 33.88 ft.
Power pole S50°W 50.40 ft.
Clump of Ash 3" N45°W 52.41 ft.
NW corner of porch S41°E 85.48 ft.

Note: Rebar 1 foot below the surface of the road.

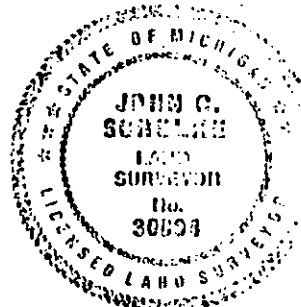

Peer Group Reviewed
Date: 12-9-93
Mason County Surveyor

Signed by *John C. Schulke*
Surveyor's Michigan License No. RLS-30894

Date Dec. 12, 1993