


MAR 08 1994

COMMISSION

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Mason</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>17N</u> R <u>18W</u>	<u>K-10</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

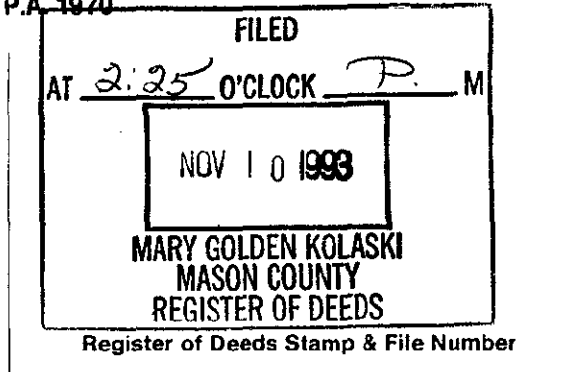

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

I, Richard Hays, in a field survey on November 2, 19 93 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:

**K-10 1/4 CORNER COMMON TO SECTIONS 25 & 26**

1838 G.L.O. Corner Not Set 1984: Survey Recorded in Liber 320,  
Corner falls into Bass Lake Page 217 shows the 1/4 Corner and  
Witnesses.

1966: BASS LAKE SHORES SUBDIVISION

Point of Beginning is the 1/4  
Corner common to Sections 25 & 26  
3/4" Iron Pipe East 201.76'  
3/4" Iron Pipe West 372.60'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

**K-10 1/4 CORNER COMMON TO SECTIONS 25 & 26**

1993: Found 3/4" Pipe from the Plat of BASS LAKE SHORES  
3/4" Iron Pipe East 201.76'


C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

**K-10 1/4 CORNER COMMON TO SECTIONS 25 & 26**

Replaced Found Iron with a Mason County Monument with 5/8"  
Re-Rod with cap stamped to identify Corner. This Monument is  
accepted as the best available evidence of the position of the  
Corner.

6" W. Pine	N-06°-E	13.60'
14" R. Oak	N-58°-W	16.64'
12" R. Oak	S-08°-W	29.14'
14" W. Pine	S-36°-E	34.88'

Under East and West Power Line



Signed by Richard Hays Date November 5 1993  
Peer Group Reviewed and Approved  
Surveyor's Michigan License No. 25847 Date: 11-5-93 FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971  
REVISOR MAY 14, 1976  
REVISED JAN., 1983