

MAR 06 1994


COMMISSION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Mason</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T17N R 18W	M-11
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

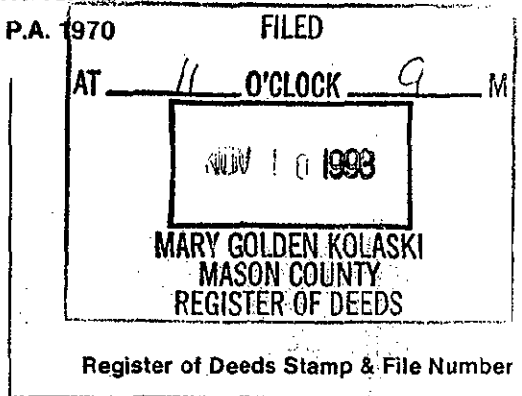

I, Richard Hays, in a field survey on October 28, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:


M-11 SECTION CORNER COMMON TO SEC. 25 & 36 T17N-R18W & SEC. 30 & 31 T17N-R17W  
 1838:G.L.O. Set Post 1982:M.D.O.T. JOB # 09423C  
 6" Beech S-49°-W 34 Links 1" Iron Rod in Monument Box  
 8" Beech N-64°-W 19 Links Power Pole N-40°-E 25.11'  
 Power Pole S-25°-E 84.74'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

M-11 SECTION CORNER COMMON TO SEC. 25 & 36 T17N-R18W & SEC. 30 & 31 T17N-R17W  
 1993: Found 5/8" Iron Bar in Monument Box in Center Line of Old US 31.  
 Power Pole N-47°-E 41.13'

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

M-11 SECTION CORNER COMMON TO SEC. 25 & 36 T17N-R18W & SEC. 30 & 31 T17N-R17W  
 Placed Mason County Cap on existing 5/8" Iron Bar in Monument Box.  
 Cap stamped to identify Corner. This Monument is accepted as the best available evidence of the position of the Original Corner.  
 29" Willow N-07°-W 327.25'  
 Power Pole N-47°-E 41.13'  
 9" Spruce S-66°-E 122.40'  
 Power Pole S-16°-W 139.42'  
 Monument Box in the Center line of Old US 31



Signed by Richard Hays Date November 2, 1993  
 Surveyor's Michigan License No. 25847 Peer Group Reviewed and Approved Date: 11-9-93