

SURVEY & REMONUMENTATION


OCT 30 1996

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners **COMMISSION**

MASON <small>(County)</small>	Located In:	Corner Code <i>#7</i>
1. Public Land Survey	T <u>18</u> N R <u>15</u> W	D-9
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

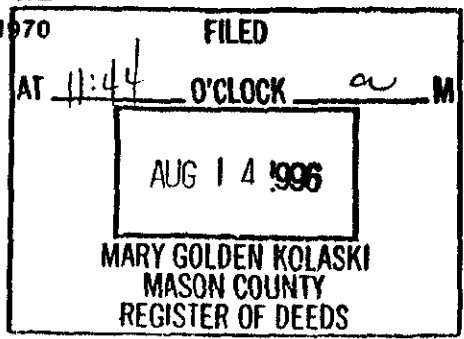

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

I, Sammy S. Barnett, in a field survey on July 16, 1996, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2								
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

D-9 1/4 Corner for Sections 20 and 29, T18N, R15W.

Sylvester Sibley, 1838, G.L.O.
 Set Wood Post
 #1 Hemlock 8" N57°E 151ks.(7.26')
 #2 Hemlock 10" S45°W 71ks.(4.62')

Carl Roser, RLS #12028, 1978
 Set DNR conc. Monument, using single proportional method between the Section Corners.

Ken Ross, RLS #17834, 1993
 Found DNR Monument, survey #93282

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

D-9 1/4 Corner for Sections 20 and 29, T18N, R15W.

On July 16, I found a "D.N.R. stamped 3" Alum. disk, next to Pine post with D.N.R. tag, corner set on toe of E-W bank, 450 + - feet south of P. M. River, I found no evidence to dispute this location for the corner.

Condition of recorded witnesses are;

- #1 Gone
- #2 Gone
- #3 Found in good condition
- #4 Found in good condition
- #5 Found in good condition


C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

D-9 1/4 Corner for Sections 20 and 29, T18N, R15W.

I accepted D. N. R. Monument has a substancial marker for the corner, and is accepted as a careful and faithful reestablishment of the position of the original corner.

Pine Post w/ D. N. R. tag 0.5' NE

- (ext. BT #3) Black Oak 13" N 80° W 38.72'(60d spike in North side of tree)
- (ext. BT #5) Red Oak 8" N 85° E 21.15'(60d spike in south side of tree)
- Red Oak 5" S 55° E 18.73'(60d spike in NE side of tree)
- Red Oak 21" N 05° E 33.95'(60d spike in Ne side of tree)

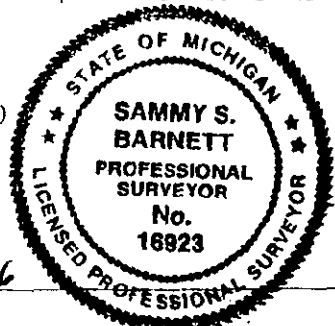

Signed by Sammy S. Barnett
 Surveyor's Michigan License No. 16923

Date 8-12-96

Peer Group Reviewed
 and Approved
 Date: 8-13-96
Kenneth L. Ross
 Mason County Surveyor

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
 REVISED MAY 14, 1979
 REVISED JAN., 1983