

SURVEY & REMONUMENTATION


MAR 16 1998

LIBER -- 4 PAGE 123

LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

SECTION

For corners in <u>MASON</u> (County)	Located in:	Corner Code #
1. Public Land Survey	T 18 N R 16 W	D - 13
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling In Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

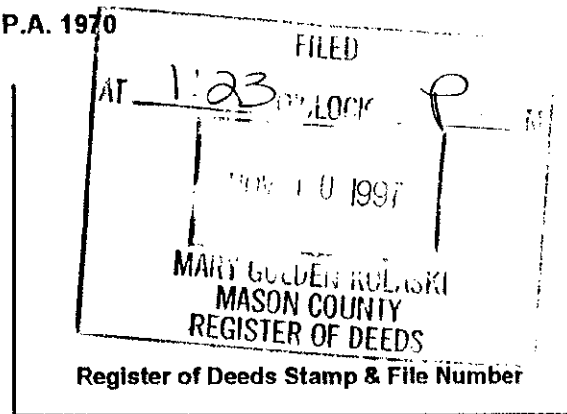

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

I, Sammy S. Barnett, in a field survey on Sept. 15th 19 97, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:
 D - 13 South one-quarter corner of section 32 T18N, R16W

1838 GLO survey by Mullett & Brookfields
 Set post
 # - 1 Hemlock 8" N40W 44 lks (26.4')
 # - 2 Beech 10" N62E 8 lks (5.28')

1879 survey by R.O. Towns
 Monument not given
 Identified by old trees

1958 Mason Co. Rd. Comm.
 Iron, no witnesses

1890 survey by W.E. Mitalcalf
 Monument not given
 Stump remains of Government witnesses

1988 survey by K. Ross
 found existing iron
 no witnesses given

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

D - 13 South one-quarter corner of section 32 T18N, R16W
 On Sept 15th 1997 I found a 1/2" rebar in the centerline of the East-west blacktop road and in an old occupation line to the South, the condition of the witnesses is as follows,

1 Gone # 2 Gone

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:


D - 13 South one-quarter corner of section 32 T18N, R16W

On Sept 15th 1997 I replaced the 1/2" rebar with a Standard Mason County Monument and accepted this location as the best available evidence of the position of the original corner, and took the following witnesses.

3 Power pole # 50 S71E 133.87' PK in NE side
 # 4 Power pole # 49 S78W 150.38' PK in SE side
 Nothing else within 1000' to witness to

Distance West 2658.58' to C 13
 Distance East 2644.76' to E 13

Corner fall in approximately 2' of cut, Corner is in a monument box.

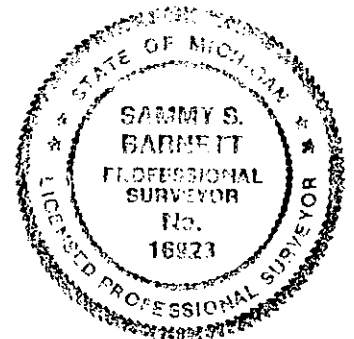

Signed by Sammy S. Barnett

Date 11-4-97

Surveyor's Michigan License No. P S # 16923

Peer Group Reviewed
 and Approved
 Date: Oct. 2, 1997
Kenneth L. Ross
 Mason County Surveyor