


SURVEY & REMONUMENTATION

MAR 16 1998

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A.

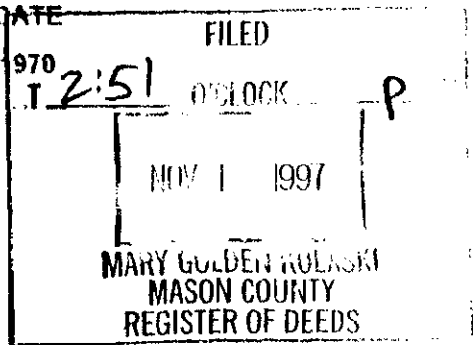

For corners **SECTION**

MASON

(County)

Located In:

Corner Code #

- 1. Public Land Survey T 18N R 16W H-05
- T R
- T R
- T R
- 2. Property Controlling S T R
- in Section S T R
- 3. Miscellaneous S T R
- Property in Sec. S T R

- 4. Lot No. _____, Recorded Plat _____
- 5. Private Claims _____

I, Kenneth L. Ross, in a field survey on November 5, 19 97, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- H-05 1/4 Corner for Sections 10 and 15, T18N-R16W
- 1838, Sylvester Sibley, G.L.O.
Lynn Tree 16" for Corner
- 1994, Ken Ross, RLS #17634
Found 1/2" re-rod with Gordon Bonney RLS Cap, #12016

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- H-05 1/4 Corner for Sections 10 and 15, T18N-R16W

On November 5, 1997, I Kenneth Ross and Kevin Pritchard (survey tech.) found a 1/2" re-rod, 24" long, with a Gordon Bonney, RLS No. 12016, yellow cap, Iron is 3.0 feet north of the center-line of Johnson Road (gravel). I found no evidence to dispute this location for the 1/4 corner.
Note: Old fence line and tree line running to the North.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- H-05 1/4 Corner for Sections 10 and 15, T18N-R16W

I replace 1/2" re-rod by Bonney, in the exact location, with a standard Mason County Monument (5/8" re-rod, 24" long, with a 2 1/2" aluminum cap, stamped to identify the corner. Set re-rod 0.5 feet below gravel road. And is accepted as a careful and faithful re-establishment of the position the original corner.

- Ext. "RT" Maple 22" S 11° W 45.65 ft. (ext. 16p nail in se side of tree)
- Power-Pole N 62° W 93.08 ft. (P.K. nail in SW side of pole)
- Maple 8" S 24° E 37.22 ft. (60d spike in NE side of tree)
- Tw. Black Ash N 26° W 83.67 ft. (60d spike in NE side of tree)

Signed by [Signature]

Date NOV. 1, 1997

Surveyor's Michigan License No. 17634

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN. 1983
ADAPTED FOR WORD PROCESSING MARCH, 1993



[Signature]
NOV 6 1997