

DEC 18 1995


COMMISSION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>MASON</u> <small>(County)</small>	Located In:	Corner Code <u>##</u>
1. Public Land Survey	T <u>18N</u> R <u>16W</u>	K-2
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

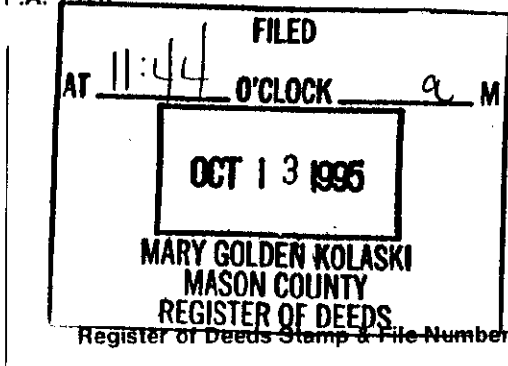

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

I, Kenneth L. Ross, in a field survey on JULY 05, 1995, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:


K-2 1/4 Corner, 2-18-16 & 1-18-16  
 1837 Mullett & Brookfield  
 (1) 10" Hemlock N 14 W 7 lks  
 (2) 12" Beech S 25 E 13 lks

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

K-2 1/4 Corner, 2-18-16 & 1-18-16  
 Sep., 1903, R. O. Towns located 1/4 post stake (Liber 2, Page 100)  
 Oct., 1903, R. O. Towns located 1/4 post by stake (Liber 4, Page ?)  
 Aug., 1977, Ross set 1" pipe on E-W fence line & midway between 2 N-S fence lines 60' apart  
 (3) Due East 113.06' Power Pole  
 Jul, 1995, Ross fd no evidence of corner and reestablished corner using Ross witness from 1977 survey

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-2 1/4 Corner, 2-18-16 & 1-18-16  
 Pd witness 3 above from Ross 1977 survey  
 Set 5/8" X 36" rebar with 2 1/2" alum. cap in CL old road bed, on fence line to east, 1.5' south of row of power poles running east and west, and is accepted as the best available evidence of the original corner.  
 N 55 W 69.58' 10" Cherry  
 S 50 W 57.67' 6" Cherry  
 S 81 E 229.11' 38" Oak  
 N 88 E 112.87' Power Pole  
 N 58 E 100.57' 8" Cherry



Signed by [Signature] Date 10-1-95

Surveyor's Michigan License No. 17634 Peer Group Reviewed and Approved

Date: 9-28-95  
[Signature]  
 Kenneth L. Ross  
 Mason County Surveyor