

SURVEY & REMONUMENTATION


MAY 07 1997

COMMISSION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Mason (County)	Located in:	Corner Code #
1. Public Land Survey	T18N R 17W	J-07
	T ___ R ___	_____
	T ___ R ___	_____
	T ___ R ___	_____
2. Property Controlling in Section	S ___ T ___ R ___	_____
	S ___ T ___ R ___	_____
3. Miscellaneous Property in Sec.	S ___ T ___ R ___	_____
	S ___ T ___ R ___	_____

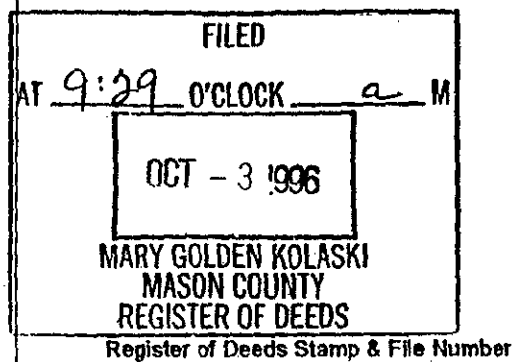

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Sammy S. Barnett, in a field survey on Sept., 19 96 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:

J-07 1/4 Corner common to Sections 14 & 23, T18N, R17W (Amber)	1838 Syl. Sibley G.L.O.	#3 Maple 36" N70E 135'	1974 J. Borsfay M.C.R.C.
Set Post	#4 Elm 4" S44 1/2 E 53'	#5 NE cor porch S35W 91.4'	Found 1" Pipe .5' below surface
#1 Lynn 10" N8E 15 lks (9.9')	1966 K.B. Stephens	Found 3/4" Pipe	#9 Trans. pole S.E. 79.3' (#6)
#2 Beech 8" S60E 9 lks. (5.94')	Found 3/4" Pipe	#6 Trans. Pole S.E. 78.7'	#10 Tel Pole S.W. 44.58' (#7)
1911 R.O. Towns Co. Surveyor	#7 Tel Pole SW 44.2'	#8 Maple 36" N.E. 135.0' (#3)	#11. Tel. Guy Pole N.W. 111.35"
Stone (no witnesses)			1974 Barry G. Krebs B.L.M.
Un-dated M.C.R.C			Found 3/4" Pipe (no new witnesses)
Stone with cross			(over)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

J-07 1/4 Corner common to Sections 14 & 23, T18N, R17W (Amber)
On Sept 6, I found a 1" pipe in an existing monument box. I found no evidence to dispute this location. The condition of the recorded witnesses are:


# 1 Gone	# 9 Same as # 6	# 17 Same as # 6 & 9
# 2 Gone	# 10 Gone	# 18 Same as # 7 & 10
# 3 Maple 48" N75E 135.96' added spike in SE side	# 11 Gone	# 19 PP. TP 54.03 spike in SW side
# 4 Gone	# 12 Gone	
# 5 Did not check	# 13 Gone	
# 6 Gone	# 14 Gone	
# 7 Gone	# 15 Gone	
# 8 Same as # 3	# 16 Same as # 3 & 8	

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

J-07 1/4 Corner common to Sections 14 & 23, T18N, R17W (Amber)
I set a Standard Mason County Monument, in the exact location of the 1" pipe inside of the existing monument box and accepted this location as a careful and faithful reestablishment of the position of the original corner.
3 Maple 48" N75E 135.96' spike in SE side
19 Power service pole N31W 45.03' spike in SW side
20 Power pole S36E 67.03' Spike in SW side
21 Blue Spruce 14" S50W 53.92' Spike in NW side

Signed by Sammy S. Barnett
Surveyor's Michigan License No. 16923

Date 9-25-96



Peer Group Reviewed and Approved
Date: 9-30-96
Kenneth L. Boss
Mason County Surveyor

J-07 1/4 Corner common to Sections 14 & 23, T18N, R17W (Amber)

1978 K. Ross

Found 1" Pipe

#12 Tel Pole S40W 44.51' (# 7 & 10)

#13 Tel Pole N70W 111.29' (# 11)

#14 Rd. Name Sign S50W 52.66'

#15 Power Pole S30E 77.04'

1984 L. Slater M.D.D.T.

Found 5/8" x 13" Bolt in 1" Pipe

along e. side of large stone.

#16 42" Maple N78E 135.88' (# 3 & 8)

#17 PP w/trans S36E 79.31' (# 6 & 9)

#18 Tel Pole S50W 44.98' (# 7 & 10)

#19 PP, TP N30W 44.60'

1990 K. Ross

Found 1" square iron

No new witnesses