

SURVEY & REMONUMENTATION

SEP 30 1993

COMMISSION

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

For corners in


MASON

(County)

Located In:

Corner Code ##

- | | | |
|------------------------------------|---------------------------|-------|
| 1. Public Land Survey | T <u>19N</u> R <u>15W</u> | D-3 |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| 2. Property Controlling in Section | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |
| 3. Miscellaneous Property in Sec. | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |

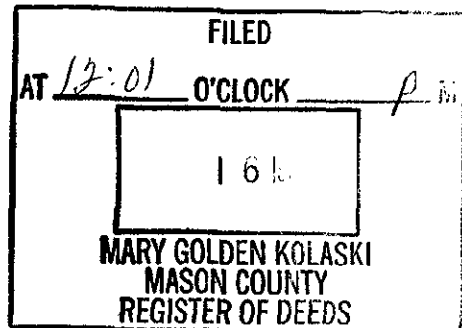

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Sammy S. Barnett, in a field survey on AUGUST, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3				●									
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

D-3 1/4 corner, Sec's 5 & 8

Post placed by Sylvester Sibley in Subdivision survey, 1838.
S 21° W 51ks.(3.30') 10" Beech
N 35° E 231ks.(15.18') 8" Beech

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

D-3 1/4 corner, Sec's., 5 & 8

Sam Barnett found 1 1/2" Flat metal strap at Old USFS Post, replaced with 1/2" re-rod, with RLS cap. October, 1987
S 71° E 9.26' 12" Red Oak
N 23° W 27.79' 15" Red Oak
N 73° E 11.53' 7" Tw. Sugar Maple

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

D-3 1/4 corner, Sec's., 5 & 8

Found 1/2" re-rod, replaced with 5/8" X 24" re-rod with alum. cap and is accepted as the best available evidence of the position of the original corner.
S 71° E 9.26' 12" Red Oak
N 23° W 27.79' 15" Red Oak
N 73° E 11.53' 7" Tw. Sugar Maple
S 64° W 46.81' 12" Red Oak



Signed by Sammy S. Barnett Date 9/9/93
Surveyor's Michigan License No. 16923

Peer Group Reviewed and Approved
Date: 9-9-93
Thomas J. Kuss
Michigan County Surveyor

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983