


LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

MASON (County) Located In: Corner Code #
 1. Public Land Survey T 19N R 15W I-12
 T _____ R _____
 T _____ R _____
 T _____ R _____
 2. Property Controlling S _____ T _____ R _____
 in Section S _____ T _____ R _____
 3. Miscellaneous S _____ T _____ R _____
 Property in Sec. S _____ T _____ R _____

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

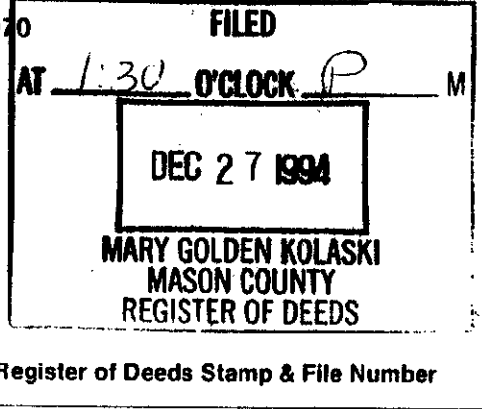

I, John Schulke, in a field survey on Nov. 5th, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Original survey established in 1838 by Sibley.
 Set a wooden post with the following references:
 1. Beech 12" N59°E 27 lks.
 2. Maple 12" S42°W 10 lks.

In 1984, D. Dunlap found iron (see corner certificate Liber 2, page 222).

In 1896, J.W. Griswold (see Book 1, Page 203) set by measurement and no ties.
 3. NE corner of Section 34 North 38.89 chains
 4. SE corner of Section 34 South 38.99 chains

In 1938, Survey by Lunde set iron stake.
 5. corner fence post (steel) N66°W 37.9 ft.
 NE Corner of Sec. 34 N01°W 2566.0 ft.
 SE corner of Sec. 34 S01°E 2566.0 ft.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 1" iron pipe pinched on bottom.
 NE corner of Section 34 N0°53'00"E 2665.27 ft.
 SE corner of Section 34 S0°53'27"W 2665.92 ft. (Grid-bearing & distances)

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

SURVEY & REMONUMENTATION

MAR 16 1998

SECTION

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 Replaced 1" iron pipe with 5/8"X36" rerod with an aluminum cap monument stamped to identify the corner. The monument 1 ft. below the surface of the road. The center line of Taylor Rd. is West 3 ft. and the center line of Stolberg Rd. is South 3 ft. The following corner references:

Chiseled "X" on Boulder	6'X4'X3'	S60°W	60.13 ft.
Power pole		N40°E	31.93 ft.
Power pole		N41°W	39.35 ft.
Ash	15"	S14°E	101.90 ft.
R Oak	15"	N30°W	113.52 ft. (scribed & blazed)

(NOTE: Accepted record 1" iron pipe as a proper re-establishment for the position of the original corner.)

Signed by John C. Schulke
 Surveyor's Michigan License No. PLS-30894

Date Nov 7, 1994

Peer Group Reviewed and Approved
 Date: Nov 7, 1994
Kenneth L. Ross
 Mason County Surveyor

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
 and Approved
 Date: Feb 25, 1997
Kenneth L. Ross
 Mason County Surveyor