

DEC 29 1998

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

SECTION

For corners in MASON (County)

Located In:

Corner Code #

- 1. Public Land Survey T 19N R 16W E-3
2. Property Controlling in Section S T R
3. Miscellaneous Property in Sec. S T R

- 4. Lot No. Recorded Plat
5. Private Claims

I, Kenneth L. Ross, in a field survey on June 22 19 98, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below.

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration: E-3 Section Corner for Sections 4, 5, 8 and 9, T19N-R16W.

1838, Sylvester Sibley, G.L.O. Set Wood Post #1 Maple 16" N 79 W 18 lks. (11.88') #2 Beech 12" S 38 E 5 lks. (3.30')

1989, Gordon Bonney, RLS #12018 Found 1/2" Re-Rod by Clint Cole no new witnesses were taken (Liber 3, page 3)

1986, Clint E. Cole, RLS #17615 Found Iron Pipe, raised with 1/2" Re-Rod #3 Poplar 8" S 34 W 54.71' #4 Poplar 10" N 23 E 63.02' #5 Poplar 10" S 38 E 53.75' (liber 340, Page 901)

1996, Kenneth L. Ross, RLS # 17634 Found 1/2" Re-Rod by Clint Cole, added one new witness. (file no. 95027a) #6 Ash 6" S 36 W 36.28'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner: E-3 Section Corner for Sections 4, 5, 8 and 9, T19N-R16W.

On June 22, 1998, I found 1/2" Re-Rod by Clint Cole, over a Well-Point, 16" in length.

Condition of Record witnesses are as follows: #1 Gone #2 Gone #3 Gone

#4 Found in good condition #5 Found in good condition #6 Found in good condition, same as #3

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner: E-3 Section Corner for Sections 4, 5, 8 and 9, T19N-R16W.


I replaced 1/2" Re-Rod by Clint Cole and Well-Point, with a break-away Harrison Iron monument, stamp MASON COUNTY MONUMENT, set in exact location of the Re-Rod, and is accepted as a careful and faithful re-establishment of the position of the original corner.

- Ext "BT" #4 Poplar 14" N 23 E 63.06' (60d spike in NW side of tree)
Ext "BT" #5 Poplar 13" S 38 E 53.73' (60d spike in SW side of tree)
Ext "BT" #6 Ash 9" S 36 W 36.28' (60d spike in SE side of tree)
New "BT" #7 Maple 20" S 52 E 95.15' (set 60d spike in NE side of tree)

Signed by [Signature]


Date Sept. 8, 1998

Surveyor's Michigan License No. 17634

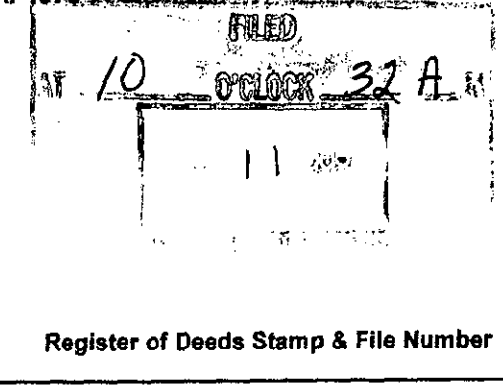

Grid table with columns A-M and rows 1-13. Cell (2,5) contains a black dot.

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971 REVISED MAY 14, 1975 REVISED JAN., 1983 ADAPTED FOR WORD PROCESSING MARCH, 1983



Peer Group Reviewed and [Signature] Date 9-8-98