

**SURVEY & REMONUMENTATION**


DEC 18 1995

**COMMISSION**

**LAND CORNER RECORDATION CERTIFICATE**  
**Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

MASON	Located In:	Corner Code #
(County)		
1. Public Land Survey	T 19 N R 17 W	L-13
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

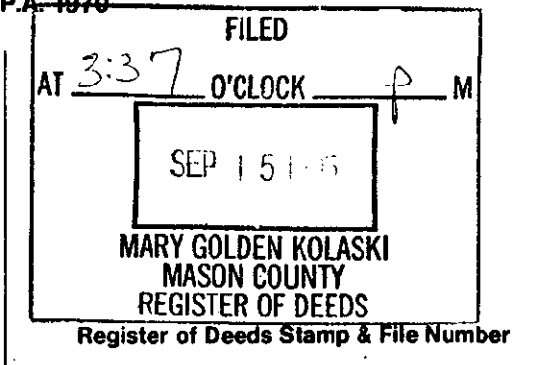

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, Sammy S. Barnett, in a field survey on September 5, 19 95, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefor as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

**A. Description of original monument and accessories and/or subsequent restoration:**

L-13 South 1/4 Corner for Section 36, T19N, R17W.

1838, Mullett & Brookfield, G.L.O., Boundary

Set Wood Post

#1 Hemlock 14" N47°E 231ks.(15.18')

#2 Birch 6" N 55°W 321ks.(21.12')

Note; Undated, Unsigned Survey, Book 1, Page 36, show a distance of 2632.08' to the SW cor. Sec. 36 and 2640.00' to the SE cor, Sec. 36.

No Date, M.C.R.C.

Iron set in Crockery

1983, L. Slater RLS7439

Found 1/2" Iron

#4 Poplar 7" N 46° E 62.27' #7 Poplar 7" N28°E 54.22'

#5 Maple 4" N 08° W 60.47' #8 1/2" Iron Pipe East

#6 Poplar 14" N 07° E 68.76' 4.97'

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**

L-13 South 1/4 Corner for Section 36, T19N, R17W.

On September 5, 1995, I ~~could~~ could not find 1/2" Iron as record by L. Slater, I believe the Iron was remove by the excavation of the road for a North-South Culvert, possibly by Mason County Road Commission, I set a new Re-rod from L.Slater's found witnesses and from record distance(4.97')to found North 1/4 Corner Section 1, T18N, R17W, I found no other evidence to dispute this location.

Condition of Recorded Witnesses is; #1 Gone #2 Gone #4 Gone #5 Found in good cond.

#6 Found dead, still standing #7 Found in good cond. #8 Found in good cond.

*NO # 3 USED*

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

L-13 South 1/4 Corner for Section 36, T19N, R17W.

I set a 5/8" Re-rod, 24" long, with an aluminum cap cap(2 1/2" in dia.), stamped MASON COUNTY MONUMENT I placed Monument 0.5 feet below gravel road in center-line, and is accepted as a careful and reestablishment of the position of the original corner.


OBT #5 Red maple N 08° E 60.52'(60d spike in NE side of tree)

OBT #6 Poplar 16" N 07° 68.76'( M.D.O.I. shiner & 60d spike in West side of tree)

OBT #7 Poplar 13" N 28° E 56.56'(60d spike in NW side of tree)

Power Pole S 76° E 141.47'( fd. 060d spike in North side of Pole)

North End, Top-center of culvert, North 25.70'



Signed by Sammy S. Barnett

Peer Group Reviewed and Approved Date 9-8-95

Surveyor's Michigan License No. 16923

Date: 9-12-95  
 Kenneth L. Ross  
 Mason County Surveyor

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971  
 REVISED MAY 14, 1975  
 REVISED JAN., 1983

LIBER 3 PAGE 293