

**SURVEY & REMONUMENTATION**

MAR 16 1998

**SECTION**

**LAND CORNER RECORDATION CERTIFICATE**  
**Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

MASON  
 (County)

Located in:

Corner Code #

1. Public Land Survey

T 19N R 17W

D-13

2. Property Controlling in Section

S \_\_\_ T \_\_\_ R \_\_\_

3. Miscellaneous Property in Sec.

S \_\_\_ T \_\_\_ R \_\_\_

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_

5. Private Claims \_\_\_\_\_

I, Theodore H. Weinert, in a field survey on JULY, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:


D-13 S. 1/4 Corner, Sec. 32  
 G.L.O. Notes Set Post  
 1838 Sylvester Sibley  
 14" Beech N 41 W 30 lks  
 18" Beech N 50 E 40 lks  
 May, 1899, R. O. Towns Ed stake set by former surveyor (Book 2, Page 45 & Book 4, Page 2)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

D-13 S. 1/4 Corner, Sec. 32  
 Set 5/8" X 36" rebar on a prorated distance based on the above described survey completed by R. O. Towns, between the SW corner and the SE corner of section 32. Trace of fence to north line. Fence line E-W at this location. This corner location is accepted as a careful and faithful perpetuation of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

D-13 S. 1/4 Corner, Sec. 32  
 Set 5/8" X 36" rebar with standard 2 1/2" cap stamped "Mason County Remonumentation".  
 8" Maple S 86 E 24.94'  
 Tri Maple N 16 E 6.40'  
 15" Maple N 61 W 23.54'  
 12" Maple S 57 W 24.15'  
 8" Maple S 21 W 36.67'  
 N 1/4 Corner Section 5, T18N, R17W, East 91.47'

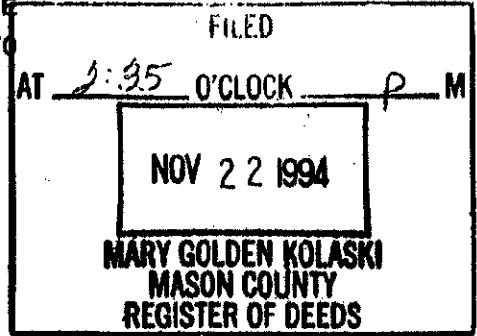

Register of Deeds Stamp & File Number

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

Signed by Theodore H. Weinert

Date 10-4-94

Surveyor's Michigan License No. 19896



Peer Group Review and Approved Date: 10-5-94  
 Approved by Kenneth L. Ross  
 MASON COUNTY SURVEYOR

APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS: JAN. 26, 1971 and REVISED MAY 14, 1975  
 Date: Feb 7 1994  
 Approved by Kenneth L. Ross  
 MASON COUNTY SURVEYOR