

**SURVEY &  
REMONUMENTATION**

**LAND CORNER RECORDATION CERTIFICATE**

MAY 03 1995

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

**COMMISSION**

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____	T. _____ 20N N. 15W E. _____ S., R. _____ W.	F1
2. PROPERTY CONTROLLING IN SECTION _____	, T. _____ N. _____ E. _____ S., R. _____ W.	Seg. 1
3. MISCELLANEOUS PROPERTY IN SECTION _____	, T. _____ N. _____ E. _____ S., R. _____ W.	
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

FILED

AT 10:10 O'CLOCK a

**NOV 17 1994**

**MARY GOLDEN KOLASKI**  
**MASON COUNTY**  
**REGISTER OF DEEDS**

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Patrick R. Leemon do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram - over) were, in a field survey on October 30 1994, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on \_\_\_\_\_ 19\_\_\_\_, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

**A. Description of original monument and accessories and/or subsequent restoration:**

**Closing Quarter Corner on the North Line of Section 4 T20N R15W**

This corner was not established by the General Land Office

1918 survey by C.E. Mitchell  
Set a Conc. Monu. w/ 1" gas pipe  
#1 Oak 4 S27E 12.5 links  
#2 Oak 8 S15W 18 links  
#3 NE Cor. Sec. 4 East 39.68 ch.  
#4 NW Cor. Sec. 4 West 39.68 ch.

1971 survey by Robert A. Griffin 13584

Found the conc. monu. by Mitchell and replaced it with a 5" sq. by 60" long conc. monu. w/ brass cap.  
#7 W.Oak ? S78E 106.13 feet  
#8 P.Post 4 South 1.8 feet  
#9 NE cor. of conc. block cabin S37W 51.77 feet

**B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:**

I found the 5" square by 60" long concrete monument w/ brass cap by Griffin extending 12" above the surface and 410 feet North of the centerline of the E-W road and 37 feet west of a driveway. Witness 2 is a stump. Witness 1, 5, 6 and 7 are in good condition. Liber 1 Page 43 by Griffin documents the history of this corner. I could find no conflicting evidence that would lead to another location. This monument is accepted as the best available evidence of the position of the corner.


**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

**Closing Quarter Corner on the North Line of Section 4 T20N R15W**

Monu. The 5" square by 60" long concrete monu. with 3" brass disk was left in place

Witnesses:

S1/4 34 T21N R15W 5x60 conc. monu. West 143.79 feet  
Rebar 5/8" x 24" N2W 28.92 feet  
Rebar 5/8" x 24" N58E 63.47 feet  
W.Oak 11 S78E 106.20 feet (#5)  
P.Post 4 South 1.8 feet (#6)

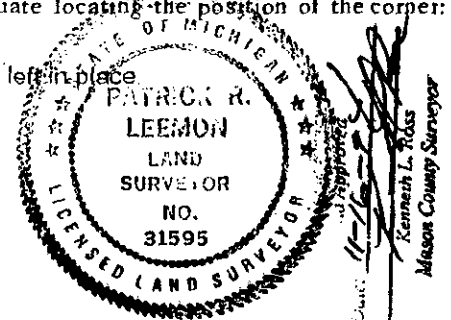

October 30, 1994

SIGNED BY Patrick R. Leemon \_\_\_\_\_ DATE \_\_\_\_\_  
31595

SURVEYOR'S MICHIGAN REGISTRATION NO. \_\_\_\_\_ (SEAL)

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_  
CHIEF OF SURVEY PARTY

APPROVED AND SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_  
MICHIGAN REGISTERED LAND SURVEYOR (SEAL)

LIBER 3 PAGE 205

SURVEYOR'S MICHIGAN REGISTRATION NO. \_\_\_\_\_