

**SURVEY & REMONUMENTATION**


OCT 29 1996

COMMISSION

**LAND CORNER RECORDATION CERTIFICATE**  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

MASON (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>20N</u> R <u>R15W</u>	<u>I-8</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

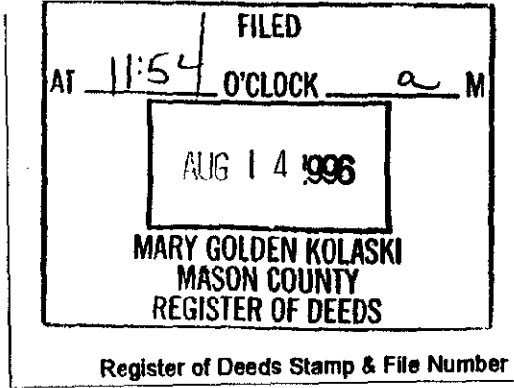

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, Sammy S. Barnett, in a field survey on July 23, 1996 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

**A. Description of original monument and accessories and/or subsequent restoration:**

I-8 1/4 Corner for Section 22 and 23, T20N, R15W.

<u>1839, John Brink, G.L.O.</u>	<u>1981, Ken Ross, #17634</u>
Set Wood Post	Set 1" Iron Pipe @ single proportional distance
#1 W. Oak 8" N77°W 121ks.(7.92')	#3 Jack Pine 8" East 15.57'
#2 W. Pine 9" N45°E 91ks.(5.94')	#4 Tri. Maple SSE 14.11'
	#5 W. Oak 6" WSW 54.56'
	Center-line old RR grade South 92 feet

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**

I-8 1/4 Corner for Sections 22 and 23, T20N, R15W.

On July 23, I found a 1" Iron Pipe with R.L.S. cap # 17634, 18 feet East of the Center-line of Taylor Road and 92 feet North of old RR grade, I found no evidence to disputed this location for the corner.

Condition of recorded witnesses are;

- #1 Gone
- #2 Found an old pine stump @ N 38° E & 8.0 feet to the face, could not identify as G.L.O. witness tree.
- #3 Found in good condition
- #4 Found in good condition
- #5 Found in good condition

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**


I-8 1/4 corner for Sections 22 and 23, T20N, R15W.

I set a Standard Mason County Monument inside the existing 1" Iron Pipe, flush with the ground, and is accepted as a careful and faithful reestablishment of the position of the original corner.

- (ext. BT #3) Jack Pine 9" N 78° E 15.57'(60d spike in North side of tree)
- (ext. BT #4) Tri. Maple 5"-5"-8" S 12° E 13.96'(60d spike in NE side of tree)
- (ext BT #5) White Oak 6" S 67° W 54.45'(60d spike in SE side of tree)
- White Oak 24" N 65° W 50.35'(60d spike in SW side of tree)

Signed by Sammy S. Barnett  
Surveyor's Michigan License No. 16923

Date 8-12-96



Peer Group Reviewed and Approved  
Date: 8-13-96  
Kenneth L. Ross  
Mason County Surveyor