

SURVEY & REMONUMENTATION

MAY 07 1997

COMMISSION


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in
Mason County
(County)

Located In:

Corner Code #

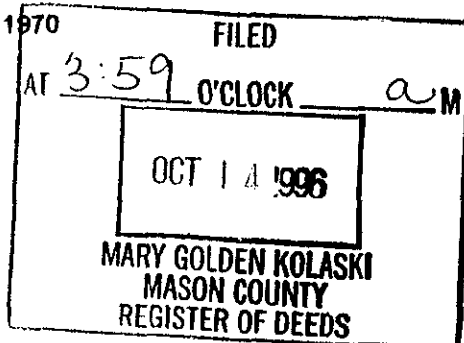

1. Public Land Survey	T	20N	R	16W	H-9
	T		R		
	T		R		
	T		R		
2. Property Controlling in Section	S	T	R		
	S	T	R		
3. Miscellaneous Property in Sec.	S	T	R		
	S	T	R		

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

	A	B	C	D	E	F	G	H	I	J	K	L	I
2	6	5	4	8	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

I, Kenneth L. Ross, in a field survey on August, 1996, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

In 1839 John Brink laid out the original section, stating, "Set quarter section post common to sections 22 and 27, Witnesses Given: (1) 12" Beech, S06°W, 39 links, (2) 11" Beech, N72°E, 32 links. In May, 1881, C. E. Mitchell found corner at this location identified by Witness Trees still standing (referring to GLO). In December, 1987, Kenneth L. Ross, RLS, Found iron at this location and raised with a P.K. Nail, No Witnesses Given. In May, 1988, Kenneth L. Ross, RLS, used this corner in a survey. In May, 1990, Kenneth L. Ross, RLS, used this corner in a survey, No Witnesses Given. In December, 1993, Kenneth L. Ross, RLS, found P.K. Nail in West Bound Lane of Freesoil Road. Witnesses Given: (3) Concrete Monument, South, 33.01', (4) P.P. N85°E, 86.31', (5) P.P. N13°W, 18.30', (6) NE Corner of House, S45°W, 79.70'.


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

In August, 1996, I found the P.K. Nail with a 3/4" iron pipe below it. I cross pinned the pipe and pulled. I searched the area further and I found no other evidence to dispute the location of this corner. Witnesses (1), (2), have been destroyed. Witnesses (3), (4), (5), and (6) are standing and in good condition.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

I replaced the existing 3/4" iron pipe in the exact location with a Standard Mason County Monument, and placed a Monument Box flush with the asphalt road surface, and is accepted as a careful and faithful reestablishment of the position of the original corner. Witnesses checked or taken:

- (3) Concrete Monument, South, 32.99'
- (4) New Spike in P.P. N85°E, 86.05'
- (5) Spike in P.P. N13°W, 18.22'
- (6) NE Corner of House, S45°W, 79.55'
- SE Corner of Garage, N40°W, 102.37'
- 2.0' North of the center-line of Freesoil Road.

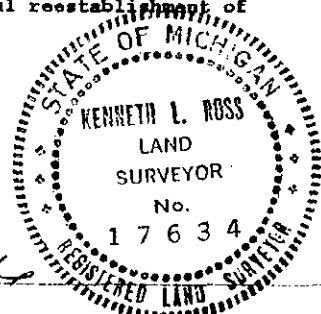

Signed by Kenneth L. Ross

Date 9-30-96

Surveyor's Michigan License No. 17634

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN. 1983
ADAPTED FOR WORD PROCESSING MARCH, 1993

Peer Group Reviewed and Approved
Date: 9-30-96
Kenneth L. Ross
Mason County Surveyor