

SURVEY & REMONUMENTATION


MAY 07 1997

COMMISSION

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Mason			
(County)	Located In:	Corner Code #	
1. Public Land Survey	T20N R 17W	K-09	
	T R		
	T R		
	T R		
2. Property Controlling in Section	S T R		
	S T R		
3. Miscellaneous Property in Sec.	S T R		
	S T R		

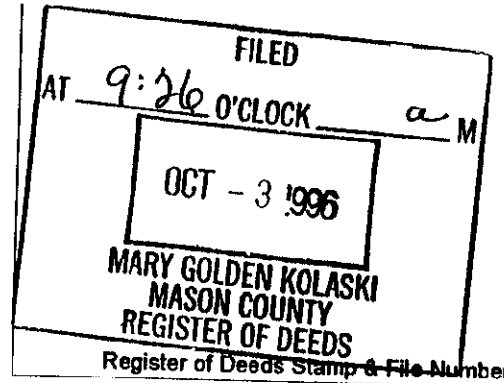

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Sammy S. Barnett, in a field survey on Sept, 19 96 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L
1												
2	6		5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

A. Description of original monument and accessories and/or subsequent restoration:
K-09 Corner common to sections 23, 24, 25 & 26, T20N, R17W (Grant)
1839 John Brink G.L.O.

- | | | |
|-----------------------------------|---|--|
| Set post | 1970 J. Bordfay found 8" metal ring and 2" pipe | #9 Tel. Junct box S66E 97.96' |
| #1 Beech 12" S41E 53.1ks (34.98') | #6 Tel pole N.E. 74.32' | 1983 M.S.H.D. found 1/2" rebar in int. rds N-S&E |
| #2 Beech 8" N72W 34.1ks (22.44') | 1974 H. Fluharty found 1" pipe set 3/8"x18" pipe inside | #10 Poplar 3" n25E 80.65' |
| 1966 K.B. Stephens found 2" pipe | #7 Tel. pole N26W 74.32' (# 6) | #11 Rd sign N40E 53.78' |
| #3 Road sign N45E 48.61' | #8 Tel. pole S45W 30.29' (# 5) | #12 Ash 3" S65W 27.69' |
| #4 Road sign N85W 17.65' | | #13 Ash 2" N35W 44.14' |
| #5 Tel. pole S45W 30.40' | | |

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner: 1990 K. Ross found iron
K-09 Corner common to sections 23, 24, 25 & 26, T20N, R17W (Grant) No new witnesses

On Sept. 9, I found 1/2" pipe at road intersections N-S-E, I found no evidence to dispute this location. The condition of the recorded witnesses are;

- | | |
|---------------------------|--------------------------------|
| # 1 Gone | # 8 Same as # 5 |
| # 2 Gone | # 9 Tel Junct. box S66E 97.96' |
| # 3 Gone | # 10 Gone |
| # 4 Road sign N85W 17.65' | # 11 Rd. sign N40E 53.78' |
| # 5 Gone | # 12 Found dead |
| # 6 Gone | # 13 Ash 5" N35W 44.14' |
| # 7 Same as # 6 | |


C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-09 Corner common to sections 23, 24, 25 & 26, T20N, R17W (Grant)
I replaced the 1/2" pipe, in the exact location, with a Standard Mason County Monument and accepted this location as a careful and faithful reestablishment of the original corner

- # 4 Road sign N85W 17.65'
- # 9 Tel Junct. box S66E 97.96'
- # 11 Rd. sign N40E 53.78'
- # 13 Ash 5" N35W 44.14'
- # 14 Elm 5" N60E 66.35'
- # 15 Twin Cherry 5" & 5" S30W 64.45' slope distance spike in SE side

Signed by Sammy S. Barnett
Surveyor's Michigan License No. 16923 16923

Date 9-27-96



Peer Group Reviewed and Approved
Date: 97 30 96
Kenneth L. Ross
Mason County Surveyor