

**SURVEY &  
REMONUMENTATION**


MAY 07 1997

**COMMISSION**

**LAND CORNER RECORDATION CERTIFICATE**  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

MASON _____ (County)	Located in:	Corner Code #
1. Public Land Survey	T 20N R 17W	L-01
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

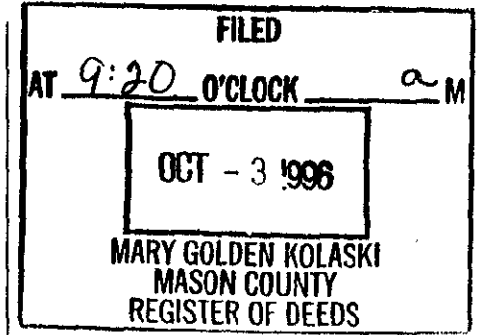

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, Sammy S. Barnett, in a field survey on July 26, 1996 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and for that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L
1											
2	6		5		4		3		2		1
3											
4	7		8		9		10		11		12
5											
6	18		17		16		15		14		13
7											
8	19		20		21		22		23		24
9											
10	30		29		28		27		26		25
11											
12	31		32		33		34		35		36
13											

**A. Description of original monument and accessories and/or subsequent restoration:**

L-01 North 1/4 corner for Section 1, T20N, R17W, on County Line

Note; Government Land Office did not set this corner.

- |                               |                                |
|-------------------------------|--------------------------------|
| <u>1993, Ken Ross, #17634</u> | #3 Tri. White Oak S41°E 34.14' |
| Set 1/2" Re-Rod w/ RLS cap    | #4 Tw. White S88°E 40.98'      |
| #1 White Pine 9" S54°W 14.76' | Oak                            |
| #2 White Oak 18" S08°W 43.67' |                                |

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**

L-01 North 1/4 corner for Section 1, T20N, R17W, On County Line

On July 26, I found 1/2" ReRod w/ RLS cap # 17634, Ken Ross, I found no evidence to dispute this location for the corner. Found old fence line 33 feet South, fence runs East-West.

Condition of recorded witnesses are;

- #1 Found in good condition
- #2 Found in Good condition
- #3 Found in good condition
- #4 Found in good condition

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**


L-01 North 1/4 corner for Section 1, T20N, R17W, on the County Line

I replaced 1/2" re-rod, in the exact location, with a Standard Mason County Monument, flush with the ground surface, and is accepted as a careful and faithful reestablishment of the original corner.

- (ext. BT #1) White Pine 9" S 54° W 14.76' (60d spike in SE side of tree)
- (ext. BT #2) White Oak 18" S 08° W 43.67' (60d spike in West side of tree)
- (ext. BT #3) Tri. White Oak 8"-8" 10" 34.14' (60d spike in SW side of tree) S 41° E
- (ext. BT #4) Tw. White Oak (9"- 10" S 88° E 40.96' (60d spike in South side of tree)

Signed by Sammy S. Barnett  
Surveyor's Michigan License No. 16923

Date 9-28-96

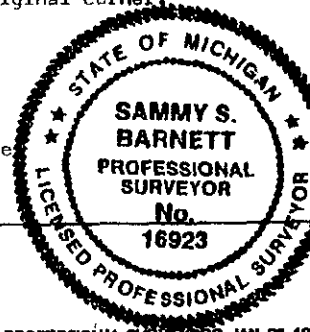

Peer Group Reviewed and Approved.  
Date: 9-30-96  
Kenneth L. Rous  
Mason County Surveyor