

APPROVED LAND CORNER
P.A. 345 OF 1990
MIDLAND COUNTY

7/18/95 *gsl*

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

244

For corners in MIDLAND Located In: _____ Corner Code # _____
(County)


1. Public Land Survey	T <u>14N</u> R <u>1E</u>	<u>E-2</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

STATE OF MICHIGAN
MIDLAND COUNTY
REMONUMENTATION & FILED

14 AUG 95 3:04 P.M.

BEVERLY J THAYER
REGISTER OF DEEDS
Register of Deeds Stamp & File Number

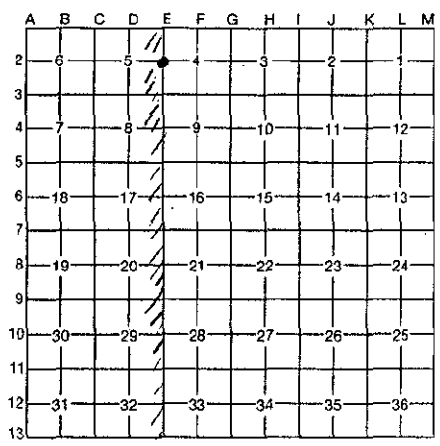

I, PAUL B. LAPHAM, in a field survey on MAY, 19 95, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
E-2 West 1/4 Corner Section 4

1831 HARVEY PARKE, NOT SET IN GLO SURVEY
NO C.S.R.
M.S.H.D. R/W MAPS
1-13-76 HERBERT FLUHARTY, FOUND 1/2" IN MON. BOX

WITNESS NOTE: Witnesses from above surveys and LCRC's are available in dossier file; which was presented to peer review committee and is on file at the Register of Deeds Office.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
E-2 West 1/4 Corner Section 4

Found 1/2" x 24" pipe in Mon. Box. Replaced with 5/8" x 18" re-rod. Measured South 454.90 feet to East 1/4 corner T14N, R1W, Avg. G.L.O. = 457.71 feet.
Found 5 Old unrecorded witnesses.

SURVEY &
REMONUMENTATION
COMMISSION

Corner, E-2 was approved for remonumentation at a Peer Review Committee Meeting on 7-18, 19 95.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-2 West 1/4 Corner Section 4
Set 5/8" x 18" re-rod with brass cap stamped "Midland Co. Remon. Cor. PS 9433" in Monument Box 454.90 feet North of East 1/4 Corner, Section 13, T14N, R1W. Accepted as best available evidence of the accepted position of the corner.

- N22°W 103.27' - N&T IN 15" OAK
- N39°W 57.31' - N&T IN 12" OAK (OLD WITNESS)
- N50°W 61.48' - N&T IN 23" OAK
- N54°W 43.64' - N&T IN 18" OAK (OLD WITNESS)
- N79°W 36.23' - N&T IN 12" OAK (OLD WITNESS)
- S61°W 43.67' - N&T IN 15" OAK (OLD WITNESS)
- S45°W 50.59' - N&T IN 16" OAK (OLD WITNESS)



Signed by Paul A. Lapham

Date 7/21/95

Surveyor's Michigan License No. 9433