SURVEY & REMONUMENTATION COMMISSION

JAN 17 1996

MONTCALM COUNTY REMONUMENTATION PROGRAM

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN
MONTCALM COUNTY
RECORDED

20 DEC 95 11:41 A.M.

VIRGINIA L. KNEPPER
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

For corners in Montcalm (County) — Located In: Ferris Township — Corner Code #

1. Public Land Survey — Sec. 33 T 11 N R 5 W — F-13, S 1/4
   T____ R____
   T____ R____
   T____ R____
2. Property Controlling — S____ T____ R____
   in Section — S____ T____ R____
3. Miscellaneous — S____ T____ R____
   Property in Sec. — S____ T____ R____
4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

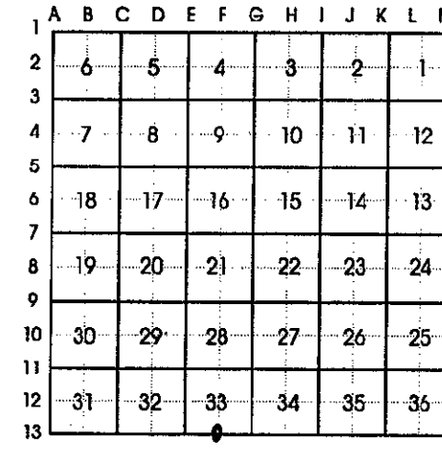

I, William Tingley a field survey on October 31, 1995, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

1831, Robert Clarke, Jr. Deputy Surveyor, GLO Notes
Set Post
Beech 7" N53°E 21 links
Beech 13" N59°W 12 links
August 22, 1911, E.D. Youdan, County Surveyor, Field Book 11-5, Page 24
Found large stone point up set by J.E.Youdan, Took new Bearing Tree
Maple 5" S 17-1/2°E 31'10"
September 10 and 11, 1912, E.D. Youdan, County Surveyor
Found Stone thrown out in grading road
Reestablished from my new Bearing Tree of 1911
Drove Gas Pipe

ACCEPTED BY THE MONTCALM COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER MICHIGAN PUBLIC ACT 345 OF 1990 AT A MEETING HELD 12-5-95

WGT.
William Tingley, PS, Chairman

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Did not find pipe. Set 126-2/3 feet West of NE Corner, Section 5 per Youdan record of 1912 when surveying Section 5, 10-5 agreeing with 1912 distances to Section Corners

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Set Remonumentation Monument

Set P.K. Nail & Tag In Eastside Post	**N05°E**	**30.92 feet**
Set P.K. Nail & Tag in Westside Post	**N15°W**	**33.65 feet**
Remonumentation monument for Section Corner 4 and 5, T10N-R5W, East 126.67 feet		
Centerline East-West Pavement, South 8.1 feet		
Southwest Corner Section 33	**West**	**2642.89 feet**
Southeast Corner Section 33	**East**	**2638.50 feet**

This corner is accepted as a careful and faithful perpetuation of the position of the original corner.

Signed by William G Tingley Date 12-12-95

Surveyor's Michigan License No. 30104

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
ADAPTED FOR WORD PROCESSING MARCH, 1993

STATE OF MICHIGAN
WILLIAM G. TINGLEY
PROFESSIONAL SURVEYOR
NO. 30104
LICENSED PROFESSIONAL SURVEYOR

LIBER 3 PAGE 265