

**SURVEY & REMONUMENTATION**

For corners APR 11 1995  
MENOMINEE

**COMMISSION**

**LAND CORNER RECORDATION CERTIFICATE**  
Filing Requirement of Act 74, Mich. P.A. 1970


Approved by Menominee County  
Land Survey Remonumentation  
Peer Group Under Act 345 Of  
P.A. of 1990 On 12/19 19994  
Del Davis RLS  
ACTING Chairman

Located In:	Corner Code ##
1. Public Land Survey T <u>33N</u> R <u>27W</u>	<u>G-5</u>
T _____ R _____	_____
T _____ R _____	_____
T _____ R _____	_____
2. Property Controlling S _____ T _____ R _____	_____
in Section S _____ T _____ R _____	_____
3. Miscellaneous S _____ T _____ R _____	_____
Property in Sec. S _____ T _____ R _____	_____

RECEIVED FOR RECORD  
94 DEC 12 AM 8:56  
PAGE # 94 BK 4  
BARBARA MORRISON  
REGISTER OF DEEDS  
MENOMINEE, MI 49825

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

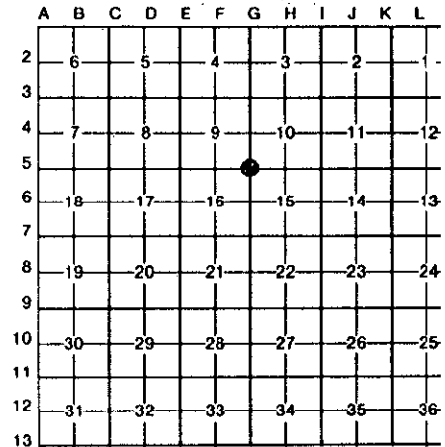

I, William Lenca, in a field survey on July 07, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:

- 1848: Original Survey by John Mullett - B.T.'s - Tam, 04", N32°E, 10 lks & Tam, 06", S51°E, 04 lks.
- 1975: L.C.R.C. No. 92 recorded by George B. Wilson, RLS No. 17607, states that a 2 inch diameter aluminum pipe/stamped cap was set from one original B.T. stump hole (Tam, 04", N32°E, 10 lks). Mr. Wilson states that this position fits well with GLO swamp calls North, 8.5 chains; South 22 chains and West 12.2 chains. New B.T.'s - 5" Tam, 320° Azm, 13.4' - 3" Cedar, 232° Azm, 9.6' - 4" Tam, 160° Azm, 3.3' - 3" Tam, 102° Azm, 2.1'.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

A 2 inch diameter aluminum pipe with a 3-1/4 inch diameter aluminum cap stamped for the corner location was found along with 2 B.T.'s - 4" Tam, 160° Azm, 3.3' - 3" Tam, 102° Azm, 2.1' - as described in L.C.R.C. No. 92. The other 2 B.T.'s described above were destroyed during construction of a drive running south from this location. The corner location falls 88.5 feet south of an East-West County Road, and fits with recorded distances shown on L.C.R.C. No. 92. This corner has been used for survey control over the past 19 years, and is accepted as a careful and faithful perpetuation of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
Accepted 2" dia. Alum. Pipe/3-1/4" cap stamped for corner location (also stamped RLS 17607 - 1975):

7" dia. Tamarack	N53°E	10.01 feet	Scr. NBT
7" dia. Tamarack	S38°E	32.18 feet	Scr. NBT
7" dia. Tamarack	S55°W	32.35 feet	Scr. NBT
9" dia. Tamarack	N49°W	35.08 feet	Scr. NBT
Survey Sign Post	East	1.0 feet	

NOTE: All bearings are magnetic bearings. All distances are measured with steel tape. Distances to trees are to nail in side of tree.

Signed by William Lenca Date July 09, 1994  
Surveyor's Michigan License No. 26461

94