

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: Missaukee Located In _____ Corner Code # _____
(County)


1. Public Land Survey	T	22N	R	5W	K10
	T	_____	R	_____	_____
2. Property Controlling in Section	S	T	R	_____	_____
	S	T	R	_____	_____
3. Miscellaneous Property in Section	S	T	R	_____	_____
	S	T	R	_____	_____

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on Feb. 12, 2007 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

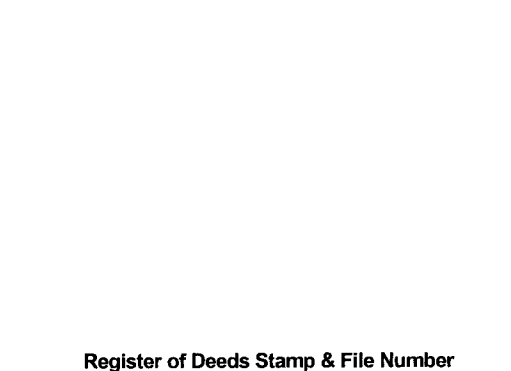

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26	●	25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

K10 – 1852 – GLO – A. Curtis – Set Post
 W. Pine 15" N40°W 36 L.
 Y. Pine 16" S55°E 49 L.
 - 1967 – LCRC #487 – K. J. Ostling
 Set Cons. Dept. Mon. by proportionate measurement between Section corners. No evidence of previous corner and nothing left for U.S. BT's
 7" J. Pine N57°E 19.7'
 10" J. Pine S82°W 9.2'

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

K10 – ¼ Corner common to Sections 25 & 26 – Fd. 4" Dept. of Conservation (DOC) Alum. Cap on 1" galv. iron pipe per Ostling.
 No GLO evidence. DOC (DNR) Mon. accepted as a careful and faithful reestablishment of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K10 – 4" DOC (DNR) Alum. Cap on 1" galv. iron pipe.
 N10°W 11.21' to fd. nail in W. side 15" J. Pine scribed 'XBT'
 N57°E 19.92' to fd. nail in SE side 13" J. Pine (KJO)
 S20°W 33.84' to fd. nail in E. side 16" Oak scribed 'XBT'
 S84°W 9.52' to fd. nail in S. side 14" J. Pine (KJO)
 Add Blue Carsonite Post 1' NE



Signed by: Craig W. McVean Date: 12/18/2007
 Surveyor's Michigan License No.: 39088