LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in MISSAUKEE (County)

	Located In:	Corner Code ##
1. Public Land Survey	T 23N R 6W	G-3, H-1
	T ____ R ____	I-2, I-3
	T ____ R ____	
	T ____ R ____	
2. Property Controlling	S ____ T ____ R ____	
in Section	S ____ T ____ R ____	
3. Miscellaneous	S ____ T ____ R ____	
Property in Sec.	S ____ T ____ R ____	

Register of Deeds Stamp & File Number

4. Lot No. _____ , Recorded Plat _____
5. Private Claims _____

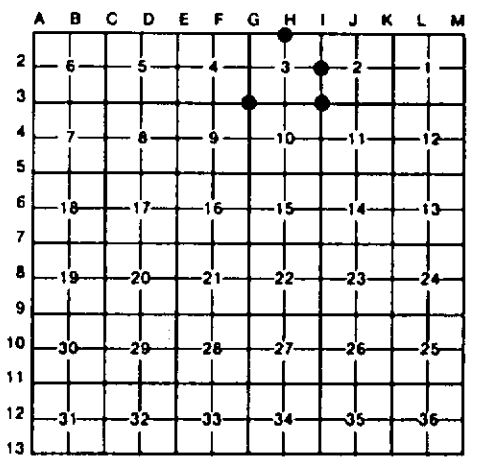

I, CARL F. ROSER, in a field survey on SEPTEMBER 25, 19 89, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

G-3: REESTABLISHED SE COR SEC 4 BY DOUBLE PROPORTIONATE MEAS TO US & E.A. BEUTHIENS' SURVEYS.

H-1: REESTABLISHED N 1/4 COR OF SEC 3 MIDWAY & ON LINE BETWEEN SEC COR'S 1/2 MILE E & W. S'LY EDGE OF SPRUCE SWAMP IS 176' ± 15' NORTH. CTR OF TRAIL (COURSE N50°W) IS 760' ± NORTH.

I-2: REESTABLISHED W 1/4 COR SEC 2. SINGLE PROPORTION TO U.S.(GLO SUR) BETWEEN SEC COR'S 1/2 MILE N & S.

I-3: REESTABLISHED SE COR OF SEC 3 AT DOUBLE PROPORTIONATE MEAS TO GLO SURVEY; 1 1/2 MILES SOUTH, 1 MILE NORTH, 2 MILES WEST & 1 MILE EAST.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

G-3: REESTABLISHED SE COR SEC 4 BY DOUBLE PROPORTIONATE MEAS TO US & E.A. BEUTHIENS' SURVEYS.

H-1: REESTABLISHED N 1/4 COR OF SEC 3 MIDWAY & ON LINE BETWEEN SEC COR'S 1/2 MILE E & W. S'LY EDGE OF SPRUCE SWAMP IS 176' ± 15' NORTH. CTR OF TRAIL (COURSE N50°W) IS 760' ± NORTH.

I-2: REESTABLISHED W 1/4 COR SEC 2. SINGLE PROPORTION TO U.S.(GLO SUR) BETWEEN SEC COR'S 1/2 MILE N & S.

I-3: REESTABLISHED SE COR OF SEC 3 AT DOUBLE PROPORTIONATE MEAS TO GLO SURVEY; 1 1/2 MILES SOUTH, 1 MILE NORTH, 2 MILES WEST & 1 MILE EAST.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

G-3: DROVE 1" X 32" GALV PIPE W/ ALUM DNR CAP. SET CED POST.

6" MAPLE	N35°W	12.5'
4" MAPLE	N75°E	8.4'
10" CEDAR	S45°E	29.1'
10" CEDAR	S20°E	14.3'
10" MAPLE	N85°W	32.2'

H-1: SET DNR MON & 4" X 7' TREATED PINE POST.

9" CEDAR	N70°E	25.1'
4" MAPLE	S65°E	46.3'
5" MAPLE	S35°E	20.9'
8" BALSAM	S05°W	15.0'
6" MAPLE	N80°W	3.6'

I-2: DROVE 1" X 8' GALV PIPE W/ALUM DNR CAP & DROVE 4" X 7' TREATED PINE POST W/LOC TAG.

8" MAPLE	N65°W	13.3'
7" CEDAR	N20°E	20.2'
4" CEDAR	S55°E	1.8'
5" CEDAR	S15°W	17.4'
10" CEDAR	S80°W	11.3'
N-S RANDOM LINE	EAST	57'

I-3: DROVE 1" X 8' GALV PIPE W/ALUM DNR CAP & DROVE 4" X 7' TREATED PINE POST W/LOC TAG.

12" TAMARACK	S65°E	46.2'
11" CEDAR	S65°E	50.3'
11" CEDAR	S15°E	82.4'
10" CEDAR	S10°W	98.4'
N-S RANDOM	EAST	79'

Signed by Carl F. Roser Date 8-13-92

Surveyor's Michigan License No. 12028

STATE OF MICHIGAN CARL F. ROSER LAND SURVEYOR No. 12028 REGISTERED LAND SURVEYOR

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983