

LIBER 16850 PG 421

COPY

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Table with columns: Oakland (county), Located in:, Corner Code #. Rows include Public Land Survey, Property Controlling in Section, and Miscellaneous Property in Sec.

\$ 7.00 MISCELLANEOUS RECORDING
\$ 2.00 REMONUMENTATION
19 DEC 96 11:02 A.M. RECEIPT# 17B
PAID RECORDED - OAKLAND COUNTY
LYNN D. ALLEN, CLERK/REGISTER OF DEEDS

APPROVED BY: 10-2-96
OAKLAND COUNTY REMONUMENTATION
PIER GROUP COMMITTEE

Register of Deeds Stamp & File Number

4. Lot No. Recorded Plat

5. Private Claims

I, Joseph C. Kapelczak, in a field survey on 29 January, 1996, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

Grid table with columns A-M and rows 2-13. A dot is marked at the intersection of column G and row 3.

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Post set in 1816 G.L.O. survey: S 64 W 10 lks, 4" Ironwood. S 75 E 51 lks
20" White Oak
LCRC L.15423 P.131, Kapelczak 1993
1/2" rerod.
West 0.71' PK nail north side 10" Walnut
N 20 E 91.55' PK nail east side 48" Walnut
East 128.69' electric insulator north side 18" Walnut

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Recovered 1/2" rerod w/cap not legible in east side 12" Walnut
No witnesses.

SURVEY &
REMONUMENTATION


MAY 22 1997

COMMISSION

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Set Remonumentation Brass Cap.

N 45 E 90.92' set nail w/remon tag northwest side 42" Walnut
S 30 E 60.76" set nail w/remon tag southwest side 8" Elm
S 20 W 33.52' set nail w/remon tag east side 6" Elder
N 0.72' set nail w/remon tag in north side 12" Walnut

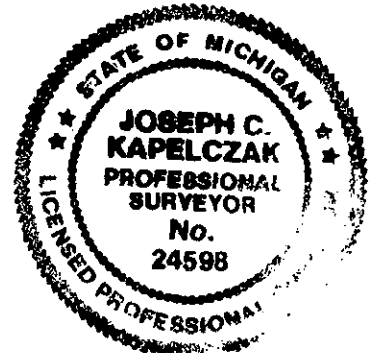

700 FILE
200

Signed by Joseph C. Kapelczak
Surveyor's Michigan License No. 24598

Date 10/1/96