

SURVEY & REMONUMENTATION

LIBER 17277 PG 684

MAR 04 1998

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in SECTION Oakland (County)

Located in: City of Troy Corner Code #


- 1. Public Land Survey T 2N R 11E A-3
2. Property Controlling in Section S T R
3. Miscellaneous Property in Sec. S T R

Compliance with ACT 345, P.A. 1990
APPROVED ON: 4-9-97 RS
OAKLAND COUNTY REMONUMENTATION PEER GROUP COMMITTEE

\$ 7.00 MISCELLANEOUS RECORDING
\$ 2.00 REMONUMENTATION
9 JUN 97 12:18 P.M. RECEIPT# 94A
PAID RECORDED - OAKLAND COUNTY
Register of Deeds Clerk/REGISTER OF DEEDS

- 4. Lot No. , Recorded Plat
5. Private Claims

I, Randy Kolehouse, in a field survey on March 13 19 97, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

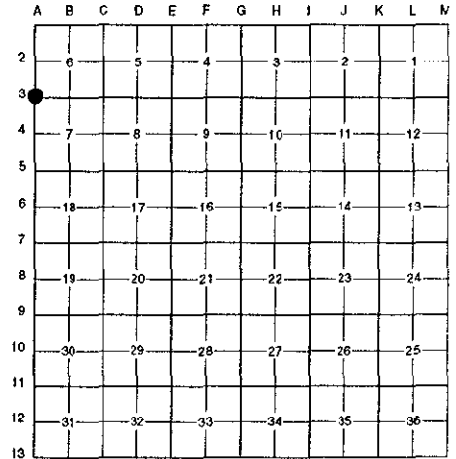

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Table with 4 columns: Corner Code, Date, Description, and Monument Type. Row 1: A-3, 1817, Wampler, G.L.O., Set Post. Row 2: 1926, N/A, Survey, N/A. Row 3: N/A, N/A, Charnwood Hills, N/A. Row 4: N/A, N/A, Middlesex County Home Sites, N/A. Row 5: N/A, N/A, O.C. Tax Maps, N/A.

Records indicate this corner is common with M-3, T2N, R10E.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

A-3 Found a brass disk in a monument box at the C/L intersection of Adams Road (bit.) running North and South and Square Lake Road (bit.) running East and West. G.L.O. notes indicate this corner is common with M-3, T2N, R10E. Checks closely distances as shown in recorded plats.

Measure North 2663.54' to A-2 (G.L.O. = 2640.0') (Charnwood Hills No. 1 = 2663.77')
Measure South 2701.3' to A-4 (G.L.O. = 2640.0') (Middlesex Co. Home Sites = 2701.39')
Measure East 2649.21' to B-3 (G.L.O. = 2659.8')

100 FILE
Loo ✓

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-3 Replaced 2" iron with a 3" brass disk with a 5/8" x 24" rebar with brass cap stamped "Oakland County Remonumentation P.S. #25854" in an existing monument box.

- PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in SE Side P. Pole N 49° E 72.11'
PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in NE Side P. Pole N 40° W 73.97'
PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in SE Side Surveillance Pole S 58° W 73.25'
PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in NE Side Surveillance Pole S 37° E 73.25'

The selected location is accepted by the Contractor and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

Signed by Randy J. Kolehouse

Date 5/28/97

Surveyor's Michigan License No. 25854

