

SURVEY & REMONUMENTATION

LIBER **14960** PR **103**

MAY - 1 1995

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

94 242433

OK - T. SMITH

For corners in

Oakland
(County)

COMMISSION

Located In: Orion Corner Code #
Township

- | | | |
|------------------------------------|---------------------------|------------|
| 1. Public Land Survey | T <u>4</u> N R <u>10E</u> | <u>E-2</u> |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| 2. Property Controlling in Section | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |
| 3. Miscellaneous Property in Sec. | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |


\$ 7.00 MISCELLANEOUS RECORDING
\$ 2.00 REMONUMENTATION
8 SEP 94 3:18 P.M. RECEIPT# 134B
PAID RECORDED - OAKLAND COUNTY
LYNN D. ALLEN, CLERK/REGISTER OF DEEDS

Compliance with ACT 345, P.A. 1990

APPROVED ON: 1-5-94
OAKLAND COUNTY REMONUMENTATION REGISTER OF DEEDS SIGNATURE FILE NUMBER

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Huston K. Kennedy, in a field survey on November 9, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

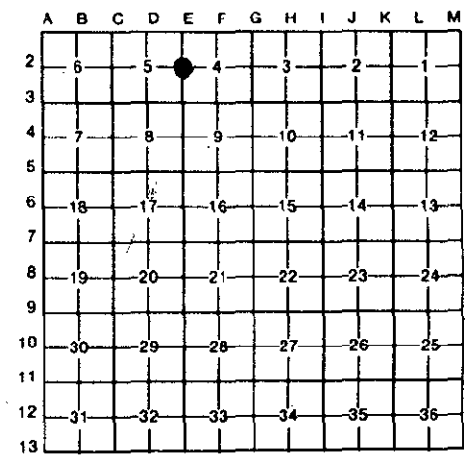

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

1817-GLO Wampler, D.S.; Set Post; 14" Tamarac S60°E 28 Lnks; 10" Tamarac N20°W 6 Lnks
1983-Kennedy, P.S. #17623; LCRC L.8538, Pg.729 - Set PK Nail
1993-Carlson, P.S. #9189; LCRC L.13471, Pg.040 - Set PK Nail

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

1993 Kennedy Surveying, Inc. - Kennedy, P.S. #17623 - Fnd an existing hole where the PK Nail was set in the centerline of Indianwood Road, which is bituminous surface. There is an old fence line extending to the South.

The PK Nail has been lost but the witness points from the 1993 LCRC are still existing and they were used to reset and verify the location of the PK Nail.

I accepted the location of the reset PK Nail as the best evidence of the original corner position.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-2 I replaced the reset PK Nail with a 5/8" x 24" Iron Rod with a 2" diameter cap stamped Oakland County Remonumentation P.S. #17623 in a monument box.

- S05°W-17.60 ft-Set PK & Remon. Washer on top of Guard Rail Post
- S45°E-30.21 ft-Set PK & Remon. Washer on top of Guard Rail Post
- N30°E-21.14 ft-Set PK & Remon. Washer on top of Guard Rail Post
- N30°W-21.21 ft-Set PK & Remon. Washer on top of Guard Rail Post

The selected location is accepted by me and is generally accepted by Professional Surveyors as the best available evidence of the position of the original position.

Signed by Huston K. Kennedy
Surveyor's Michigan License No. 17623

Date August 11, 1994

