

SURVEY & REMONUMENTATION

JAN 20 95 011242

LIBER 15213 PG 075

OK - T. SMITH

93-1010

MAY - 1 1995

LAND CORNER RECORDATION CERTIFICATE

For corners in

Filing Requirement of Act 74, Mich. P.A. 1970 9.00 MISCELLANEOUS RECORDING

Oakland
(County)

COMMISSION

Located In: Oakland Corner Code #

\$ 2.00 REMONUMENTATION
20 JAN 95 7:48 A.M. RECEIPT# 11B
PAID RECORDED - OAKLAND COUNTY
LYNN D. ALLEN, CLERK/REGISTER OF DEEDS


1. Public Land Survey	T	<u>4N</u>	R	<u>11E</u>	<u>G-5</u>
	T		R		
	T		R		
	T		R		
2. Property Controlling in Section	S		T	R	
	S		T	R	
3. Miscellaneous Property in Sec.	S		T	R	
	S		T	R	

Compliance with ACT 345, P.A. 1990

APPROVED ON: 12-19-94
OAKLAND COUNTY REMONUMENTATION PEER GROUP COMMITTEE
Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Grant J. Ward, RLS, in a field survey on November 28, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

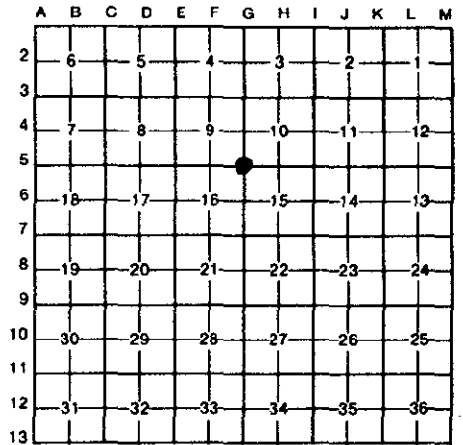

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

G-5 Post, per G.L.O. Notes.

[Handwritten signature]

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


G-5 Corner common to Sec. 9, 10, 15 & 16, T. 4 N., R. 11 E. Set Monument Box, 5/8" Iron Rod and Brass Cap #22445 0.5' South of the Centerline of Stoney Creek Road. This corner location is a careful and faithful perpetuation of the position of the original corner.

Previously Recorded in L. 5892, P. 261 (0); and L. 12838, P. 433 (0) of Oakland County Records.

(n) Indicates the number of references that confirms this corner by dimensional tie.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- G-5 Corner common to Sec. 9, 10, 15 & 16, T. 4 N., R. 11 E. Set Monument Box, 5/8" Iron Rod and Brass Cap #22445.
- Due North 18.08' Set P.K. Nail & Brass Disc #22445 in top of Guard Rail Post.
- Due South 17.33' Set P.K. Nail & Brass Disc #22445 in top of Guard Rail Post.
- S. 50° W. 36.68' Set P.K. Nail & Brass Disc #22445 in top of Guard Rail Post.
- N. 50° W. 36.59' Set P.K. Nail & Brass Disc #22445 in top of Guard Rail Post.
- N. 73° E. 5.32' Found Iron Rod.
- S. 03° E. 32.38' Found Iron Rod.
- S. 01° E. 33.00' Found Iron Rod.

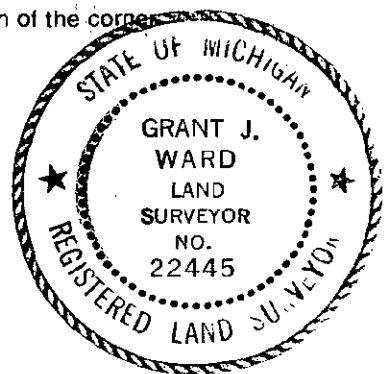

Signed by [Signature] Date December 27, 1994

Surveyor's Michigan License No. 22445