

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

oakland

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY <u>30</u> T. <u>5</u> N. R. <u>8</u> E.		B-10, C-10
2. PROPERTY CONTROLLING IN SECTION _____, T. _____ S., R. _____ E.		
3. MISCELLANEOUS PROPERTY IN SECTION _____, T. _____ S., R. _____ E.		
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Donald L. Bissell, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on October, 1984, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

B-10 Center Section Found iron rod, Albright witnesses (3-22-72) N60°W - 29.25' - 30" Maple S45°E - 28.75' - 36" Cherry (stump) S30°W - 44.25' - 18" Cherry	C-10 E 1/4 Corner Found iron rod 4" below gravel
---	---

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

B-10 Center Section Set 1" Pipe over iron rod 4" below gravel S34°W - 44.47' - 14" B. Cherry N55°W - 29.33' - 32" Maple N29°E - 46.00' - 14" Maple (Clump) S67°E - 25.19' - Telephone Pole	C-10 E 1/4 Corner Set 1" pipe over rod N63°W - 42.03' - 6" B. Cherry N25°E - 49.35' - 12" B. Cherry (clump) N63°E - 43.00' - N. Gate post S33 E - 28.09' - 7" B. Oak
--	---


SIGNED BY _____ DATE _____

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____

APPROVED AND SIGNED BY Donald L. Bissell DATE 11-5-84
CHIEF OF SURVEY ARTS
MICHIGAN REGISTERED LAND SURVEYOR

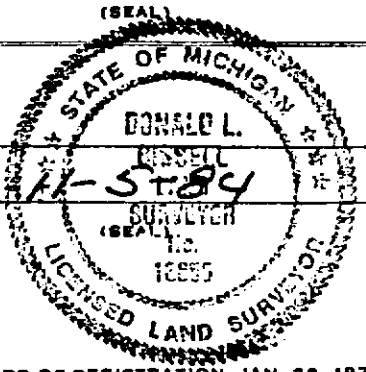

SURVEYOR'S MICHIGAN REGISTRATION NO. 18655