

LIBER 15095 pg 015

Nov 15 94 295377

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

OK - T. SMITH


For corners in
Oakland
(County)

Located In: Oxford Twp. Corner Code #

\$ 7.00 MISCELLANEOUS RECORDING
\$ 2.00 REMONUMENTATION
15 NOV 94 8:56 A.M. RECEIPT# 13B
PAID RECORDED - OAKLAND COUNTY
LYNN D. ALLEN, CLERK/REGISTER OF DEEDS
ACT 345, P.A. 1990
APPROVED ON: 9-7-94
OAKLAND COUNTY REMONUMENTATION
PEER GROUP COMMITTEE
Register of Deeds Stamp & File Number

Table with 3 columns: Description, Located In (T, R, S), and Corner Code. Includes entries for Public Land Survey, Property Controlling in Section, and Miscellaneous Property in Sec.

4. Lot No. , Recorded Plat
5. Private Claims

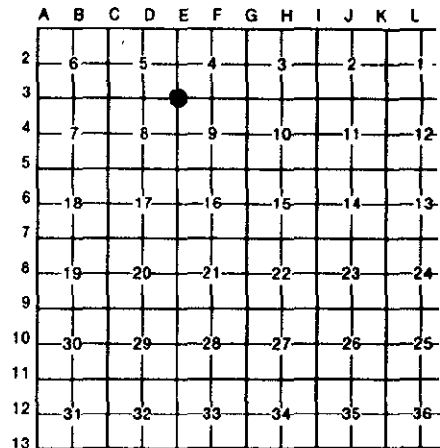

I, Huston K. Kennedy in a field survey on August 10, 1994, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- 1818-GLO Wampler, D.S.; Set Post 6" Aspen N01*W 16 Links; 6" Aspen S13*E 36" Links
1.) 1972-Buckerfield, P.S. #10868; LCRC L.5892, Pg.263 - Fnd 1/2" Iron Rod
2.) 1974-Elrich, P.S. #18986; LCRC L.6225, Pg.711 - Fnd Iron
3.) 1974-Kennedy, P.S. #17623; LCRC L.6379, Pg.289 - Fnd Boat Spike
4.) 1979-Kobs, P.S. #14097; LCRC L.7455, Pg.805 - Fnd 5/8" Iron Rod
5.) 1982-Kennedy, P.S. #17623; LCRC L.8132, Pg.538 - Fnd 2" Iron Pipe
6.) 1983-Kennedy, P.S. #17623; LCRC L.8332, Pg.346 - Fnd Boat Spike
7.) 1972-Buckerfield, P.S. #10868; Survey L.5880, Pg.273 - Fnd 1/2" Iron Rod, used same wit as 1972 LCRC
8.) 1974-Elrich, P.S. #18986; Survey L.6225, Pg.709 - Fnd Iron, used same wit as 1974 LCRC
9.) 1975-Kennedy, P.S. #17623; Survey L.6490, Pg.322 - Fnd Boat Spike, used same wit as 1974 LCRC

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

1994 Kennedy Surveying, Inc. - Kennedy, P.S. #17623 - Fnd 3/4" Bolt Spike that is located 5" under the road surface and 1' North of the centerline of Oakwood Road, which is bituminous, and 6' East of the center of Thomas Road to the North, which is gravel surface.

Witnesses from LCRC #1, 2 & 4 were used to recover and verify the location of the found 3/4" Bolt Spike.

I accepted the found 3/4" Bolt Spike as the best evidence of the original corner position.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- E-3 I replaced the found 3/4" Bolt Spike with a 5/8" x 24" Iron Rod w/2" diameter brass cap stamped Oakland County Remonumentation, PS #17623 in a new Monument Box.
S11°W 28.59' Set PK & Remon. Washer NW face 16" Oak
S64°E 70.27' Set PK & Remon. Washer North face 16" Oak
N61°E 88.21' Set PK & Remon. Washer South face 15" Oak
N58°E 65.43' Set PK & Remon. Washer SW face 17" Oak

The selected location is accepted by me and is generally accepted by Professional Surveyors as the best available evidence of the position of the original corner.



Signed by [Signature]
Surveyor's Michigan License No. 17623

Date October 14, 1994