

SURVEY & REMONUMENTATION

LIBER 14833 PG 142

94 193386

MAY - 1 1995

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

OK - T. SMITH

For corners in Oakland

COMMISSION

	Located In:		Corner Code #
	5N	11E	
1. Public Land Survey	T	R	E-4
	T	R	
	T	R	
	T	R	
2. Property Controlling in Section	S	T	R
	S	T	R
3. Miscellaneous Property in Sec.	S	T	R
	S	T	R

\$ 7.00 MISCELLANEOUS RECORDING
\$ 2.00 REMONUMENTATION
15 JUL 94 7:31 A.M. RECEIPT# 1A
PAID RECORDED - OAKLAND COUNTY
LYNN D. ALLEN, CLERK/REGISTER OF DEEDS
Compliance with ACT 345, P.A. 1990

APPROVED ON: 7-11-94
OAKLAND COUNTY REMONUMENTATION
PEER GROUP COMMITTEE
Register of Deeds Stamp & File Number


4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

Bruce Antcliff

November 10

93

I, _____, in a field survey on _____, 19 _____, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

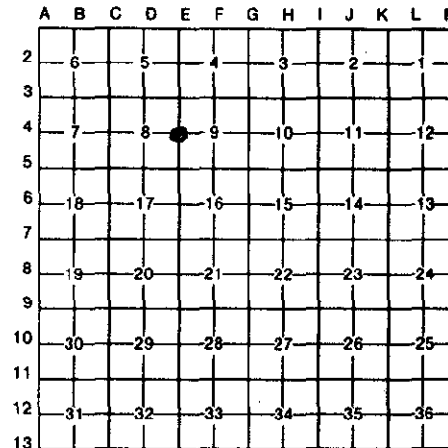

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

E-4	GLO Post	L.C.R.C. L.6379 P. 287 (1974) 1/2" iron bar West 35.42' 6" Maple N 35° E - 88.10' 15" Maple S 20° W - 41.93' 19" Maple	Survey: H. Kennedy (10/22/74) Same as L.C.R.C. L. 6379, P. 287 Survey: Air Land Surveys, Inc. (2/12/91) N 25° W 84.90' IK in E. Face of 24" Ash N 40° W 40.53' C.L. USGS Mon. West 46.20' PK N Face 10" Maple S 30° W 41.90' PK SE Face 24" Maple
-----	-------------	--	---

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

E-4 Found 1/2" iron bar at intersection of gravel roads E, and N & S (Leonard Road and Lake George Road).
Checks the following witnesses:

L.C.R.C. L. 6379, P. 287 S 20° W - 41.93' 19" Maple W - 35.35' - 8" Maple	Survey: Air Land Surveys, Inc. (2/12/91) N 40° W 40.53' C.L. USGS Mon. West 46.20' PK N Face 10" Maple S 30° W 41.90' PK SE Face 24" Maple
---	---

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-4 The selected location is accepted by the Contractor and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

Set 5/8" rebar with standard Oakland County cap.

P.K. Nail and Brass Tag in NW Face 24" Maple S 30° E - 41.20'
P.K. Nail and Brass Tag in SE Face Tri-10" Ash S 50° W - 51.86'
P.K. Nail and Brass Tag in NE Face 6" Beech N 20° W - 66.74'
P.K. Nail and Brass Tag in S Face P. Pole S 85° E - 182.19'



Signed by Bruce Antcliff
Surveyor's Michigan License No. 25826

Date 7-11-94